



Full Color P1.667 LED Display Small Pixel LED Display High Definition For Illumination

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen
- Brand Name: SOL COLUR
- Certification: SO9001 3C CE FCC IP65 IP68 ISO14001 ROHS
- Model Number: P1.667
- Minimum Order Quantity: 1 Square Meters/per square meters
- Price: USD 2000-2500 Square Meters
- Packaging Details: Wooden box flight case,
- Delivery Time: 10 days after received deposit
- Payment Terms: D/A, L/C, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Product Name: P1.667 Small Pixel Led Display Screen
- Color: Full Color
- Application: Illumination
- Certificate: SO9001 3C CE FCC IP65 IP68 ISO14001 ROHS
- Warranty: 3 Years
- Chip: Taiwan MacroBlock
- Highlight: Full Color P1.667 LED Display, Small Pixel LED Display High Definition, High Definition P1.667 LED Display



More Images



Product Description

Full Color P1.667 Small Pixel Pitch LED Display Panel High Definition For Illumination

P1.25/P1.388/P1.5625/P1.667/P1.875/P1.923/P2/P2.5/P3/P3.91/P4.81

P4/P5/P6/P7.62/P8/P10/P12/P16


P1.667 Small led display cabinets

Specifications of P1.667mm small pixel led display screen

Unit Module	Item	Parameter
	Model Number	HX-P1.667-48S
	Module size	240*240
	Pixel pitch	1.667mm
	Pixels Density	360000Pixel /m2
	Pixel configuration	1R1G1B
	Package mode	SMD1010
	Pixel resolution	96dots(W)*48dots(H)
	Max Power consumption	40W
	Drive type	Constant drive
	Scan mode	1/48 1/48scan
	Port type	HUB75-A
	Brightness of white balance	≥2000cd/m2

Unit Module	Dimension	480mm*480mm
	Quanyty of Module	4
	Power supply	5V/40A*1pcs
	Thermal discharge	fan 1pcs
	Pixel per cabinet	288*288
	Best viewing distance	1M 20M
	Best viewing distance	160°(W) 120°(H)
	Temperature	storage:-35℃ +85℃ working:-20℃ +50℃
	Opration humidity	10%-95%
	Thickness	85mm

Power	Working voltage	AC220V±10%
	Average Power consumption	550W/
	Max.Power consumption	≤1500W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4or above P4
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
Main technical parameter	Driving device	Constant currentdriver IC
	Refresh frequency	≥800HZ
	Grey scale/colors	RGB256 16.7M 256levels of each color(RGB)/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	800*600/1024*768

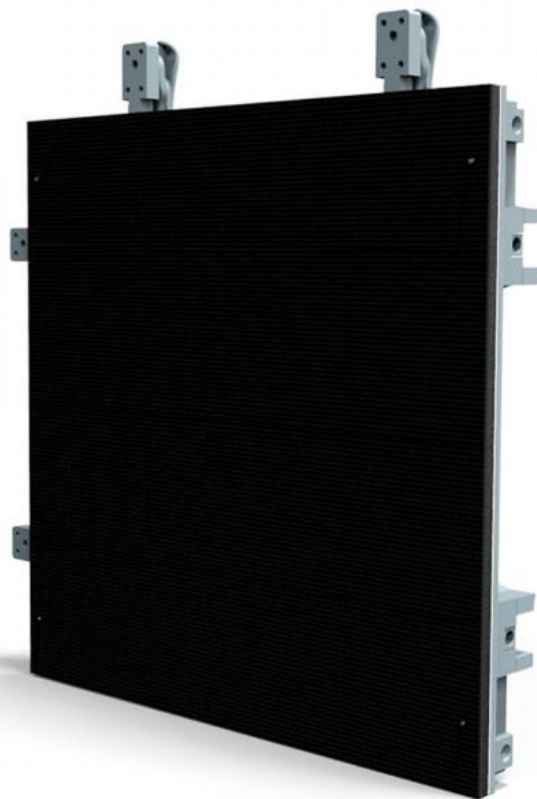

Project Cases





Company information

SHENZHEN SOL COLUR DISPLAY CO.,LTD. was established in December 2012,Is a leading LED display applications products and solutions provider.Specialized in LED research and development, manufacturing. Sales and servic,Dedicated to providing high-quality, high-performance LED applications and solutions for professional channel customers and end-users at home and abroad.

Our products have been widely used both at home and abroad. Since its foundation, we have become one of the best LED product and solution providers in the country through our unremitting efforts and have won the industry's highest recognition

The development of the company so far, the sales outlets throughout the country, the export products exported to more than 10 countries and regions, 3C, FCC, CE,IFA, IP65, IP68, IS9001, ROSH.AAA and other qualifications, product testing reports, patent certificate

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen