




Seamless Connection Led Video Screen Module Anti Ultraviolet For Illumination

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen
- Brand Name: SOL COLUR
- Certification: SO9001 3C CE FCC IP65 IP68 ISO14001 ROHS
- Model Number: P8
- Minimum Order Quantity: 1 Square Meters/per square meters
- Price: USD 500-550 Square Meters
- Packaging Details: Wooden box flight case,
- Delivery Time: 10 days after received deposit
- Payment Terms: D/A, L/C, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Product Name: P8outdoor Led Display Screen/ Led Module
- Color: Full Color
- Application: Illumination
- Certificate: SO9001 3C CE FCC IP65 IP68 ISO14001 ROHS
- Warranty: 3 Years
- Chip: Taiwan MacroBlock
- Highlight: led video screen module Anti Ultraviolet, Seamless Connection led video screen module, Anti Ultraviolet led video wall module



More Images




Product Description

We produce indoor outdoor and rental led module and led display

P1.25/P1.388/P1.5625/P1.667/P1.875/P1.923/P2/P2.5/P3/P3.91/P4.81

P4/P5/P6/P7.62/P8/P10/P12/P16

P5 outdoor led display screen module

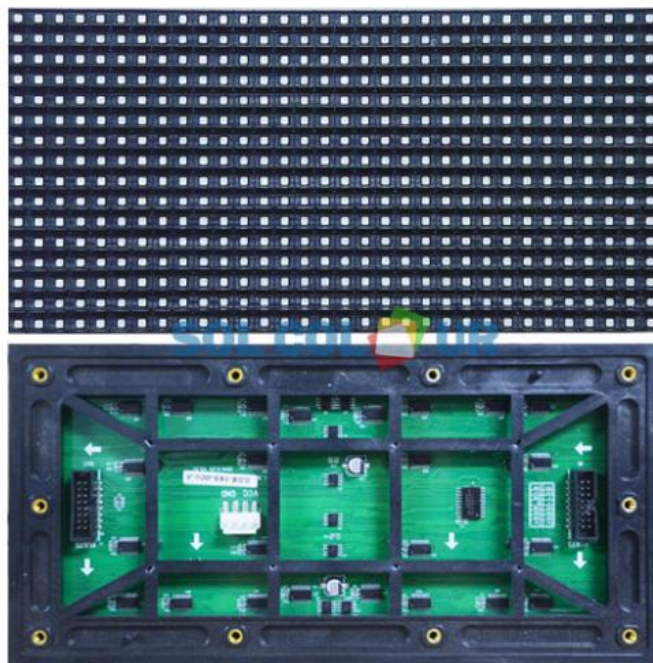

SS8 outdoor full-color technology parameters

Unit Module	Item	Parameter
	Model Number	SF-SS8-5-A
	Module size	320mm*160mm
	Pixel pitch	8mm
	Pixels Density	15625Pixel /m2
	Pixel configuration	1R1G1B
	LED Package mode	SMD3535
	Pixel resolution	40dots(W)*20dots(H)
	Max Power	30W
	Module thickness	22mm
	Weight	0.37kg
	Drive type	Constant drive
	Scan mode	1/5
	Port type	HUB75-A
	Brightness of white balance	≥7000 7500cd/m2
Module pictures		
Cabinet	Dimension	960mm*960mm*100 mm
	Monomer Module Number	24pcs
	Power supply	5V/40A*4 pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	120mm*120mm
	Best viewing distance	8M 15M
	Best viewing angle	120°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	122mm
Power	Working voltage	AC220V±10%
	Average Power consumption	330W/
	Max.Power consumption	≤1100W/
	Current	≤20mA(single LED)

Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1200HZ
	Grey scale/colors	4096,16.7M
		4096gray level/16.7M colors
	MTBF	≥9000hours
	ower switch	Automatic switch
	Display Mode	≥800*600/1024*768

Project Cases





Company information

SHENZHEN SOL COLUR DISPLAY CO.,LTD. was established in December 2012,Is a leading LED display applications products and solutions provider,Specialized in LED research and development, manufacturing. Sales and servic,Dedicated to providing high-quality, high-performance LED applications and solutions for professional channel customers and end-users at home and abroad.

Our products have been widely used both at home and abroad. Since its foundation, we have become one of the best LED product and solution providers in the country through our unremitting efforts and have won the industry's highest recognition

The development of the company so far, the sales outlets throughout the country, the export products exported to more than 10 countries and regions, 3C, FCC, CE,IFA, IP65, IP68, IS9001, ROSH.AAA and other qualifications, product testing reports, patent certificate

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen