



## Creative Stage LED Display P2 Indoor Led Display Screen For Illumination

### Our Product Introduction


#### Basic Information

- Place of Origin: Shenzhen
- Brand Name: SOL COLUR
- Certification: SO9001 3C CE FCC IP65 IP68 ISO14001 ROHS
- Model Number: P2
- Minimum Order Quantity: 1 Square Meters/per square meters
- Price: USD 2500-3500 Square Meters
- Packaging Details: Wooden box flight case,
- Delivery Time: 10 days after received deposit
- Payment Terms: D/A, L/C, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 Square Meter/Square Meters per Month



#### Product Specification

- Product Name: P2 Indoor Led Display Screen/ Led Module
- Color: Full Color
- Application: Illumination
- Certificate: SO9001 3C CE FCC IP65 IP68 ISO14001 ROHS
- Warranty: 3 Years
- Chip: Taiwan MacroBlock
- Highlight: Stage LED Display P2, illumination P2 Indoor Led Display, Stage LED Display For Illumination

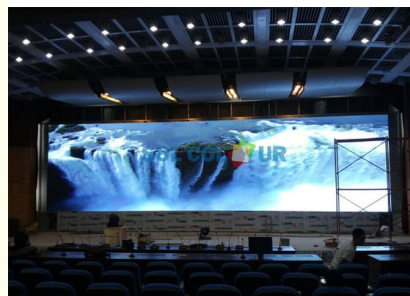

#### More Images



## Product Description

Shenzhen China Factory P2 indoor led display screen/ indoor led module /led cabinets

We produce indoor outdoor and rental led module and led display

P1.25/P1.388/P1.5625/P1.667/P1.875/P1.923/P2/P2.5/P3/P3.91/P4.81

P4/P5/P6/P7.62/P8/P10/P12/P16

### P2 indoor led display screen cabinets



#### INDOOR P2SMD 3IN1 TECHNICAL PARAMETERS

Unit Module	Item	Parameter
	Model Number	HX-P2-24S
	Module size	192*96
	Pixel pitch	2mm
	Pixels Density	250000Pixels/m2
	Pixel configuration	1R1G1B
	Package mode	SMD1010Nationstar gold wire
	Pixel resolution	96dots(W)*48dots(H)
	Max Power consumption	25W
	Drive type	Constant drive
	Scan mode	1/24Scan1/24scan
	Port type	HUB75-A
	Brightness of white balance	≥850cd/m2

Unit Module	Dimension	576mm*576mm
	Quanty of Module	18
	Power supply	5V/40A*1pcs
	Thermal discharge	fan 1pcs
	Pixel per cabinet	288*288
	Best viewing distance	3M 20M
	Best viewing distance	160°(W) 120°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Opration humidity	10%-95%
	Thickness	85mm

Power	Working voltage	AC220V±10%
	Average Power consumption	550W/
	Max.Power consumption	≤1500W/

	Current	≤20mA(single LED)
Control system	CPU	Pentium4or above P4
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
Main technical parameter	Driving device	Constant currentdriver IC
	Refresh frequency	≥400HZ
	Grey scale/colors	RGB 256,16.7M 256levels of each color(RGB)/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	800*600/1024*768



## Project Cases



### Company information

SHENZHEN SOL COLUR DISPLAY CO.,LTD. was established in December 2012,Is a leading LED display applications products and solutions provider,Specialized in LED research and development, manufacturing. Sales and servic,Dedicated to providing high-quality, high-performance LED applications and solutions for professional channel customers and end-users at home and abroad.

Our products have been widely used both at home and abroad. Since its foundation, we have become one of the best LED

product and solution providers in the country through our unremitting efforts and have won the industry's highest recognition

The development of the company so far, the sales outlets throughout the country, the export products exported to more than 10 countries and regions, 3C, FCC, CE, IFA, IP65, IP68, IS9001, ROHS.AAA and other qualifications, product testing reports, patent certificate

**SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD**



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,  
Shenzhen