



Floor Standing Indoor Rental Led Screen Die - Casting Aluminum Super Light Weight

Our Product Introduction

for more products please visit us on sol-colur.com


Basic Information

- Place of Origin: SHENZHEN
- Brand Name: SC
- Certification: .3C, ISO9001,,ROSH,
- Model Number: P3 indoor
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month




Product Specification

- Module Size: 192*192
- Scan Mode: 16S
- Warranty: 2 Years
- Pixel Resolution: 64dots(W)*64dots(H)
- Uasge: Indoor
- Place Of Origin: Shenzhen China

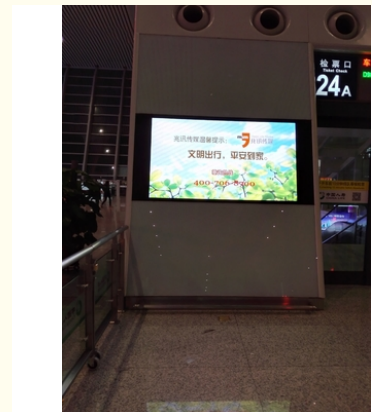

More Images



Product Description

P3 indoor rental led screen HD SMD led display / led display modules

Features :

- 1) High-definition. with 65,536dots/m2, it ensures smooth and fluent video effect;
- 2)Super light weight, super slim, easy to transport and less freight cost;
- 3) High strength and precision: die-casting aluminum , tolerance is within 0.15mm, seamless cabinet connection;
- 4) Flat mask surface and view viewing angel;
- 5)no flat cable inside. it's more stable; it's safer to use and also ensures a longer lifespan

What Applications of p3 led display?

p3 led display used in indoor stadiums, business applications, banking, securities, postal services, terminals, shopping malls, railway stations, postal services, telecommunications, agencies, monitoring, schools, restaurants, hotels, entertainment, businesses and other places of different indoor advertising.

Parameter

Unit Module	Item	Parameter
	Model Number	HX-P3-16S
	Module size	192mm*96mm
	Pixel pitch	3mm
	Pixels Density	111111Pixel/m2
	Pixel configuration	1R1G1B
	Package mode	SMD2121
	Pixel resolution	64dots(W)*32 dots(H)
	Max Power consumption	18W
	Module thickness	14.75mm(Excluding magnets) 26.63mm(Includes magnet)
	Weight	0.16kg
	Drive type	Constant drive
	Scan mode	1/16Scan 1/16scan
	Port type	HUB75-A
	Brightness of white balance	≥1500cd/m2
Power	Working voltage	AC220V±10%
	Average Power consumption	180W/H
	Max.Power consumption	≤360W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
Main technical parameter	Driving device	Constant currentdriver IC
	Refresh frequency	≥400HZ
	Grey scale/colors	RGB256,16.7Mcolor 256levels of each color(RGB)/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	800*600/1024*768
Unit Module	Dimension	576mm*576mm
	Quanty of Module	18
	Power supply	5V/40A*3pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	192*192
	Best viewing distance	3M 20M
	Best viewing distance	160°(W) 120°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Opration humidity	10%-95%
	Thickness	85mm

Product Show



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen