



SMD / DIP P12 P16 P20 Outdoor Advertising LED Display Wide Viewing Angle For Stations

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHIAN
- Brand Name: SC
- Certification: CCC ISO14001 CE IP65
- Model Number: P6
- Minimum Order Quantity: Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box, Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 Square Meter/Square Meters per Month





Product Specification

- Warranty: 2 Years
- Cabinet Size: 192mm*192mm
- Weight: 0.38kg
- Refresh: 1920HZ
- Module Size: 192*192mm
- Scan Mode: 8 Scan
- Cabinet Dimension: 192*192mm
- Place Of Origin: Shenzhen, China
- Power Supply: 5V/4A*5pcs

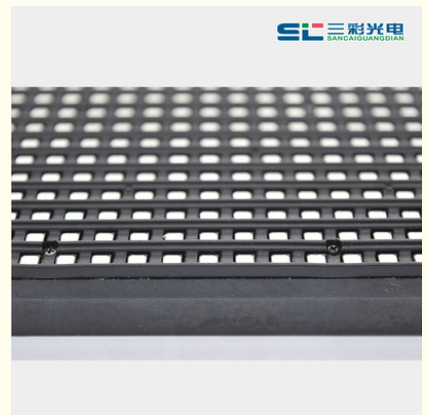

More Images



Product Description

High resolution and brightness P4,P5,P6,P8,P10,P12,P16 P20 SMD or DIP outdoor indoor full color advertising led display

Front Open Maintenance Service Panel Applications:

Widely use in stadiums, advertisement, banks, securities exchange, stations, shopping malls, postal offices, schools, restaurants, entertainment, enterprises ,highway etc.....

SS6outdoor full-color technology parameters:

Item	Parameter
Model Number	SF-SS6-8-A
Module size	192mm*192mm
Pixel pitch	6mm
Pixels Density	27777/m2
Pixel configuration	1R1G1B
Package mode	SMD3535
Pixel resolution	32dots(W)*32dots(H)
Max Power	25W
Module thickness	17.5mm
Weight	0.38kg
Drive type	Constant drive
Scan mode	1/8
Port type	HUB75-B
Brightness of white balance	≥6000 6500cd/m2
Dimension	960mm*960mm*100 mm
Monomer Module Number	25pcs
Power supply	5V/40A*5pcs
Thermal discharge	fan 2pcs
Pixel per cabinet	96mm*96mm
Best viewing distance	6M 30M
Best viewing angle	120°(W)110°(H)
Temperature	storage:-35℃ +85℃ working:-20℃ +50℃
Relative humidity	10%-95%
Thickness	117.5mm
Working voltage	AC220V±10%
Average Power consumption	400W/
Max.Power consumption	≤1200W/
Current	≤20mA(single LED)
CPU	Pentium4
Operation system	WIN98/2000/NT/XP/WIN7
Control method	Synchronization
Driving device	Constant drive IC
Refresh frequency	≥1200HZ
Grey scale/colors	4096gray level/16.7M colors
MTBF	≥9000hours
Power switch	Automatic switch
Display Mode	≥800*600/1024*768

Competitive advantages:

1. Strong supply ability: 60000 per month LED display production and standard products in stock for quick delivery.
2. Stable quality: Professionally supplied LED screen to over 100 countries and installed thousands projects in 11 years.
3. Innovation: According to customer's demands and save more time and cost on the installation, maintenance, and make sure more steady quality and easy operation.
4. Reasonable price: Profit back to customer for long term win-win cooperation.
5. Trusted service: Local cooperation distributors in Russia,Indonesia,India and Spain. 24/7 LED experts online support; LED engineer on-site support

Project Show:



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen