



Ultra Thin P5.95 Led Video Wall Rental , Slim And Light Led Backdrop Curtain

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN
- Brand Name: SC
- Certification: ISO9001,FCC,IP65,3C ,ROSH
- Model Number: P5.95 Outdoor
- Minimum Order Quantity: 1 Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Brightness: 5100Nits
- Scan Mode: 7S
- Warranty: 2 Years
- Driver IC: MBI 5124
- Uasge: Outdoor
- Place Of Origin: Shenzhen China

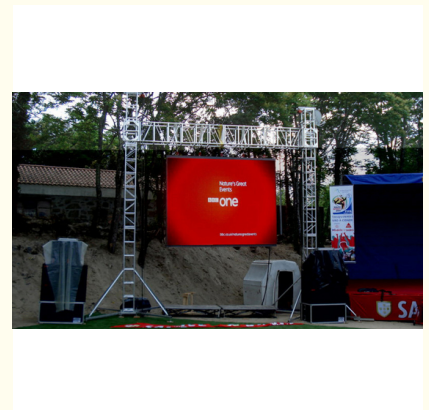

Product Description

Outdoor 5.95 Stage LED Display outdoor rental led display for live sports / shows / concert / nightclub stage

Product Quick Details:

pixel density:28224 dots/sq.m

Slim and light

Convenient assemble and movement

Product Features:

- 1, SMD guarantee super wide viewing angle, higher flatness and better performance, offers you clear and natural images in all directions. high quality full black leds, together with black mask, achieves clear and crystal picture.
- 2, High refresh rate, high grey scale level and high accurate color consistency guarantee the vivid pictures and perfect videos.
- 3, Alignment hole and location pin design for installation could achieve extreme precision between cabinets, seam splicing is less than 0.05mm.
- 4, Mute design: excellent heat dissipation, the entire screen no fan design, to achieve zero noise, provide quiet working environment.
- 5, Cabinet size is 500*500mm, thickness 75cm, and weight is only 8.2kg/pc, very light and slim, convenient in transporting and installing, thus save labor cost and avoid wasting much time, very suitable for flow shows and rents.
- 6, Die-cast aluminum with CNC is finished, the dimension tolerance of less than 0.01mm, and module shaping one time, the machining accuracy of + 0.01mm, easy to realize seamless splicing.
- 7, User-friendly locking system, aviation plug and three handles on each cabinet makes disassembly and maintenance easy

Parameter

Screen Parameters

Power	Working voltage	AC220V±10%
	Average Power consumption	400W/m ²
	Max Power consumption	800W/m ²
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥800HZ
	Grey scale/colors	4096 gray level/16.7M colors
	MTBF	≥10000hours
	Fire rate	grade one
	Display Mode	≥800*600/1024*768

Application:

Widely used in stage, concert, live on TV, wedding, conference, ceremony gala, exhibition presentation and commercial advertising etc.

Product Show



 **SHENZHEN SOL COLUR DISPLAY CO.,LTD**



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen