



Lightweight Led Tv Advertising Displays , Indoor P2.5 Led Display 3840HZ

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN
- Brand Name: SC
- Certification: ISO9001,FCC,IP65,3C ,ROSH9001
- Model Number: P2.5 Indoor
- Minimum Order Quantity: 1 Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case ,carton
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month




Product Specification

- Product Model: P2.5mm
- Module Resolution: 64dots(W)*64dots(H)
- Warranty: 2 Years
- Driver IC: MBI 5124
- Uasge: Indoor
- Place Of Origin: Shenzhen China
- Module Size: 160*160mm
- Pixel Configurature: 1R1G1B
- Power Supply: Meanwell
- Pixel Density: 160000/m2
- Viewing Angle: 140°
- Cabinet Size: 480*480
- Display Resolution: 64X64=4096
- Highlight: **Lightweight Led Tv Advertising Displays ,
Lightweight Indoor P2.5 Led Display ,
Indoor P2.5 Led Display 3840HZ**

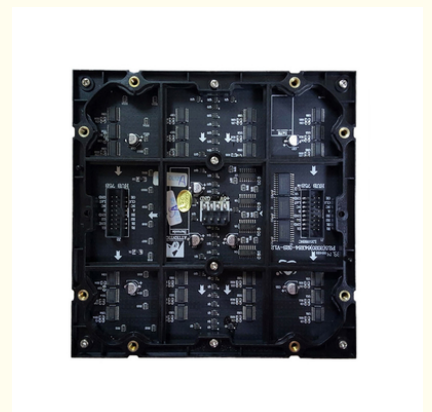

More Images



for more products please visit us on sol-colur.com

Product Description

P2.5mm SMD Super slim indoor stage LED display HD LED Display Chian Factory

Product Quick Deatils

A, Pixel Pitch:2.5mm
 B, Use Nationstar SMD2121 Lamp
 C, MBI:5153IC
 D, Rehresh Rate:3840HZ

Feature:

1. Lightweight. Convenient in transporting and installing & saving labor cost, suitable for flow shows.
2. Nice appearance and simple structures.
3. Jointed correctly, being installed & dismantled by one person without tool.
4. Humanized operating interface with breakdown indicator lights, easy to maintain.
5. High debugging brightness and no damage to gray scale, achieving the debugging technology for nice image.

Aplication:

Supermarkets, home, office, school, warehouse, shopping malls , hospitals ,production line , metro stations etc

Description

Wholesale Retailer Indoor Rental P2 .5mm Led Display Screen, High Quality Wholesale Retailer Indoor Rental P2.5mm Led Display Screens

Parameter

*Specifications of LED modules		
Technical parameters	UNIT	Parameters values
Pixel pitch	MM	2.5
Panel size	MM	L160*H160*T13
Physical density	/M ²	160000
Pixel configuration	R/G/B	1,1,1
Driving method		1/32 Constant current 1/32scan
LED Encapsulation	SMD	2121
Display resolution	DOTS	64X64=4096
Module weight	KG	0.19
Module port		HUB-HD01
Module working voltage	VDC	5
Module consumption	W	35
*Specifications of cabinet		
Cabinet size	mm	480*480
Cabinet weight	kg	5
Cabinet resolution	dots	192*192
Viewing angle	Deg.	140°
Option distance	M	2-30
Driving device		2016/5020
Every square meter module	PCS	39.06
Maximum power	W/ M ²	1400
Frame Frequency	HZ/S	≥60
Refresh frequency	HZ/S	≥320
Equilibrium brightness	CD/ M ²	≥1500
Working environment temperature	°C	-10~60
Working environment humidity	RH	10% 70%
Display working voltage	VAC	AC46 54HZ,220V±15%/110V±15%
Color temperature		8500K-11500K
Gray scale/color		≥16.7M color
Input signal		RF S-Video RGB etc
Control system		PCTV nonlinearity card, DVI display card,Linsn control system
Mean free error time	HOURS	5000
Life	HOURS	100000
Lamp failure frequency		0.0001
Antijam		IEC801
Safety		GB4793
Resist the electricity		1500V last 1min No breakdown

Steel box weight	KG/ M ²	40(standard steel box)
Earth leakage current	mA	
IP rating		The back IP40,The front IP50
Steel box size	mm	L640Xh640x80

Project Cases



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen