



Commercial 2.5mm Indoor Fixed Led Display For Business Constant Drive Type

Our Product Introduction


Basic Information

- Place of Origin: SHEN ZHEN CHINA
- Brand Name: SC
- Certification: CCC CE IP65 ROSH
- Model Number: P2.5
- Minimum Order Quantity: Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: 5 Wooden box, Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 Square Meter/Square Meters per Month




Product Specification

- Color: 1R1G1B
- Brand Name: SOL COLUR
- Module Size: 160mm*160mm
- Module Scan: 32 Scan
- Warranty: 2 Year
- Led Lamp: Nation Star
- Cabinet: Die-cast Aluminum
- Certification: CCC CE IP65 ROSH
- Module Resolution: 64*64dots
- Highlight: 2.5mm Indoor Fixed Led Display ,
Constant Drive Indoor Fixed Led Display ,
2.5mm Indoor Fixed Led screen

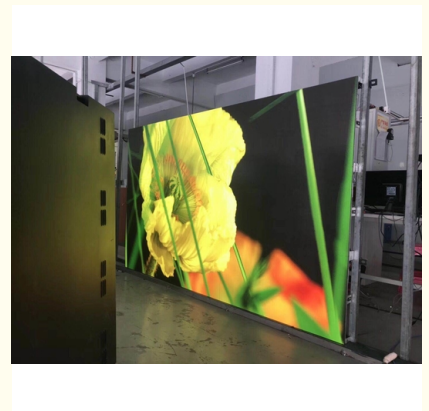

More Images



for more products please visit us on sol-colur.com

Product Description

Commercial Indoor Led Advertising Screen , Indoor Fixed Led Display For Business

Product Features:

Die-cast aluminum with CNC is finished, the dimension tolerance of less than 0.01mm, and module shaping one time, the machining accuracy of + 0.01mm, easy to realize seamless splicing
 Perfect display effect:160°super wide horizontal and vertical viewing angle covers more potential customers. The broadcasting pictures are stable with no scanning line, and the edge of image is sharp and clear when dealing with dynamic pictures.
 Support single pixel color brightness calibration and single color brightness cablibration, ensures higher color uniformity and higher brightness uniformity of each screen.
 High quality SMD 1010 with low failure is used, it has a great performance in stability, lowest light mulfunction, great color consistence as well as heat dissipation.

Product Specification:

	Item	Parameter
Unit Module	1 Model Number	HX-P2.5-32S
	2 Module size	160*160
	3 Pixel pitch	2.5mm
	4 Pixels Density	160000/m2
	5 Pixel configuration	1R1G1B
	6 Package mode	SMD1010
	7 Pixel resolution	64dots(W)*64 dots(H)
	8 Max Power consumption	20W
	9 rive type	Constant drive
	10 Scan mode	1/32scan
	11 Port type	HUB75-A
	12 Brightness of white balance	≥1000cd/m2
Unit Module	1 Dimension	640mm*640mm
	2 Quanty of Module	16
	3 Power supply	5V/40A*1pcs
	4 Thermal discharge	fan 1pcs
	5 Pixel per cabinet	256*256
	6 Best viewing distance	3M 20M
	7 Best viewing distance	160°(W) 120°(H)
	8 Temperature	storage:-35°C +85°C working:-20°C +50°C
	9 Opration humidity	10%-95%
	10Thickness	85mm

Other Specification:

Power	1 Working voltage	AC220V±10%
	Average Power consumption	233W/
	2 Max.Power consumption	≤800W/
	3 Current	≤20mA(single LED)
Control system	1 CPU	Pentium4or above P4
	2 Operation system	WIN98/2000/NT/XP
	3 Control method	Synchronization
Main technical parameter	1 Driving device	Constant currentdriver IC
	2 Refresh frequency	≥400HZ
	3 Grey scale/colors	256levels of each color(RGB)/16.7M colors
	4 MTBF	≥9000hours
	5 Power switch	Automatic switch
	6 Display Mode	800*600/1024*768



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen