




## Pixel Pitch 4mm Indoor LED Video Wall 256 \* 128mm Module Clear Vivid Image

### Our Product Introduction


#### Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: SC
- Certification: CCC IP68 CE ISO9001 ROHS
- Model Number: Indoor SMDP4
- Minimum Order Quantity: Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box, Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T
- Supply Ability: 5000 Square Meter/Square Meters per Month

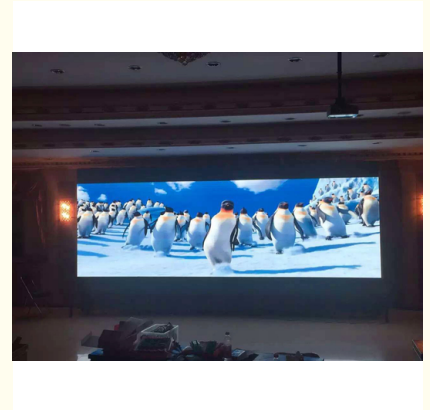

#### Product Specification

- Best Viewing Angle: 2m~10
- Color: 1R1G1B
- Control Method: Synchronization
- Brightness: 1000
- Brand Name: SOL COLUR
- Module Size: 256\*128mm
- Usage: Indoor
- Pixel Density: 62500dots/sqm
- Drive Mode: 1/8 Scan
- Highlight: Vivid Image Indoor LED Video Wall,  
4mm Indoor LED Video Wall,  
Vivid Image 4mm led video wall

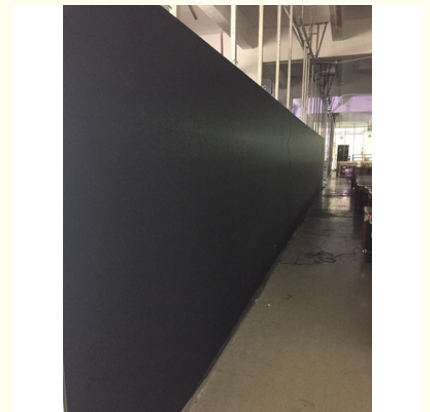

#### More Images



## Product Description

Digital Hd Video Indoor Full Color LED Display Screen 256 \* 128mm Module Clear Vivid Image

### Product Features:

- 1, Mute design: excellent heat dissipation, the entire screen no fan design, to achieve zero noise, provide quiet working environment.
- 2, Cabinet size is 500\*500mm, and weight is only 8kg/pc, very light and slim, convenient in transporting and and installation, thus save labor cost and avoid wasting much time, very suitable for flow shows and rents.
- 3, Alignment hole and location pin design for installation could achieve extreme precision between cabinets, besides module shaping one time, get seamless splicing and assemble easier.
- 4, There are three handles for lifting cabinets, aviation plug and fast lock on each side is equipped, makes very convenient and comfortable for fast installation by one person without tools, besides guarantee seamless installation and keep smoothly

### Product Information:

Unit Module	Items	Parameter
	Model Number	HX-P4-16S
	Module size	128mm*256mm
	Pixel pitch	4mm
	Pixels Density	6250000/m2
	Pixel configuration	1R1G1B
	Package mode	Nation Star SMD2121
	Pixel resolution	64dots(W)*32 dots (H)
	Max Power	18W
	Weight	0.28kg
	Drive type	Constant drive
	Scan mode	1/16scan
	Port type	HUB75-A
	Brightness of white balance	≥1500cd/m2

### General Information:

Cabinet	Dimension	512mm*512mm
	Monomer Module Number	16pcs
	Power supply	5V/40A*1pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	128*128
	Best viewing distance	4M 20M
	Best viewing angle	110°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
Power	Thickness	85mm
	Working voltage	AC110 220V±10%
	Average Power consumption	<320W/
	Max.Power consumption	<1000W/
Control system	Current	<20mA(single LED)
	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
Main technical parameter	Control method	Synchronization
	Driving device	Constant drive IC
	Refresh frequency	>1080HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	>9000hours
	Power switch	Automatic switch



+86 13751136904



chenhao@sol-colour.com



sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,  
Shenzhen