




High Gray Depth Led Video Display Panels , Concert Led Screen 500 X 500mm Module

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: SC
- Certification: ROHS, FCC.3C,ISO9001,IP65
- Model Number: P3.91 Indoor
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month

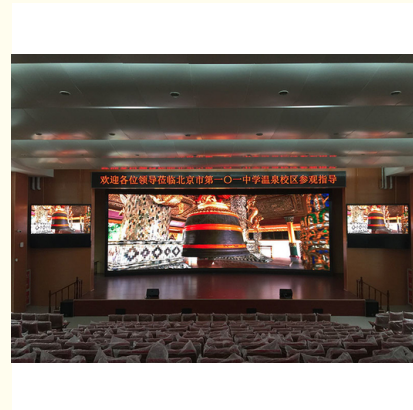

Product Specification

- Usage: Indoor
- Refresh Rate: 3840HZ
- Warranty: 2 Years
- Model Number: P3.91
- Module Size: 250X250mm
- Place Of Origin: Shenzhen China
- Pixel Configuration: 1R1G1B
- IC: MBI5124
- Cabinet Size: 500*500mm
- Highlight: Concert Led Screen Display Panels, 500 X 500mm Led Video Display Panels



Product Description

P3.91 Indoor Rental Led Display With Die Casting Aluminum 500 x 500mm Module

Description

- * Die-casting aluminum /extrusion aluminum secure and nice in constitution.
- * No fans, mute when operation.
- * Dustproof, IP43.
- * High refresh rate and high gray depth.
- * Completely black LED with high contrast.
- * Standard cabinet size is 500mm x 500mm and 480x480mm.
- * Large viewing angle, the panel viewing angle is up to 140, the vertical angle could reach 140, the image won't be out of shape and color cast between the rang.
- * Exactly connected and easy to install and dismount.

Product Specification:

Model No.	T3.91-I
Pixel pitch	3.91MM
Pixel density /sq.m	65536dots
LED configuration	1R1G1B SMD 2020
Module size	288mm x 288 mm
Cabinet size	500*500mm
Panel resolution	128*128dots
Scan way	1/16
Refresh rate	2000Hz
Panel weight	8kg
Brigtness	1000 CD / M ²
Max. power consumption	600 W/Panel
Avg. power consumption	100w/panel
Input voltage	AC 110-220 V (+-5 %)
Blind dot rate	≤0.01%
IP rating	IP3X
Panel material	Plastic
Working temperature	-20- + 60 °C
Working humidity	10-90% RH
Driving IC	MBI
Led chip	Nationstar
Lifetime	100,000h
Certification	CE,ROHS
Control system	Novastar / Linsn
Operating system	Windows / Me / 200 NT/XP
Minimum viewing distance	4m
Frame rate	50 - 60 Hz
Warranty	2 years

Application of P3.91mm

1. Conference room,Concert,Grand Ballroom,Studio, Bar, Stage, Theater, Meeting Room, Banquet Hall and etc.

2.High Refresh Rate

Refresh Rate≥2000, offering impressive visual effect.

3.Noiseless

Free of fans and air conditions, excluding noise and reducing power consumption.

4.Fine and Smooth Picture

Drive IC of high refresh rate and high grey scale to ensure stable picture and better visual effect of the screen.The latest horizontal-blanking circuit applied to completely eliminate phenomenon of blanking and smear.

5. Seamless Splicing

High conformity of picture without gap and information missing, realizing a seamless splicing display.

6. Fast Installation and Dismantlement.

Project Cases



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen