

Customization Black SMD LED Indoor Advertising Screens 900-1100nits

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: SC
- Certification: ,ROSH, FCC.3C,ISO9001
- Model Number: P3 indoor
- Minimum Order Quantity: 1 MeSquareters
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Usage: Indoor
- Refresh Rate: 3840HZ
- Warranty: 2 Years
- Model Number: P3
- Brightness: 900-1100nits
- Place Of Origin: Shenzhen China
- Pixel Configuration: 1R1G1B
- IC: MBI524
- LED Lamp: Nationstar 2020
- Scan Mode: 32S
- Module Size: 192*192mm
- Highlight: customization LED Indoor Advertising Screens, 1100nits LED Indoor Advertising Screens, customization indoor led display screen



Product Description

Black SMD Small Flexible Led Screen , Rental LED Indoor Advertising Screens

Product Features:

- 1, Pixel density is 111111 dots per square meter, high resolution brings HD visual effect.
- 2, Adopts black SMD2121, higher contrast ratio, the display effect is very good.
- 3, IC MBI5124 is used, high refresh rate, high grey scale level and high accurate color consistency guarantee the vivid pictures and perfect videos.
- 4, Die-cast aluminum with CNC is finished, the dimension tolerance of less than 0.01mm, and module shaping one time, the machining accuracy of + 0.01mm, easy to realize seamless splicing.
- 5, There are three handles for lifting cabinets, aviation plug and fast lock on each side is equipped, makes very convenient and comfortable for fast installation by one person without tools, besides guarantee seamless installation and keep smoothly
- 6, Mute design: excellent heat dissipation, the entire screen no fan design, to achieve zero noise, provide quiet working environment.


Application:

Widely used in stage, concert, live on TV, wedding, conference and commercial advertising etc.

Product Specification:

ITEM	SPECIFICATION
Pixel Pitch	3mm
Pixel Density	111111
Pixel Configuration	1R1G1B
Pixel Type	Black SMD2121
Module Size	192*192mm
Module Resolution	64*64
Cabinet Size	576*576*80mm
Cabinet Weight	9.3kg/pc
Drive Mode	1/16scan, constant current
IC	MBI5124
Brightness	1500CD/SQ.M(adjustable)
Refresh Rate	1200Hz
Frame Frequency	50&60Hz
Grey Scale Level	65536(adjustable)
Color Processing Level	16bit(adjustable)
Color Temperature	3200~9300K(adjustable)
Contrast Ratio	4000:1
Brightness/Color Uniformity	≥97%
Viewing Angle	150°(Horizontal),120°(Vertical)
Best Viewing Distance	3~50m
Life-Span	100,000 hours
Protection Level	IP20
Power Consumption (Max)	700W/M ²
Power Consumption (Avg)	300W/M ²

Product Show

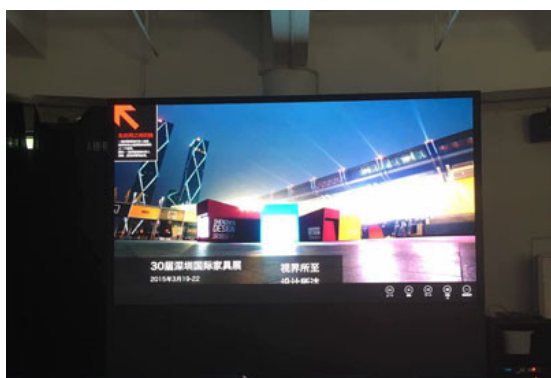

 **SHENZHEN SOL COLUR DISPLAY CO.,LTD**



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen