



Customizable P3 LED Display Indoor Advertising LED Display 3840HZ Refresh Rate

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: SC
- Certification: ,ROSH, FCC.3C,ISO9001
- Model Number: P3 indoor
- Minimum Order Quantity: 1 MeSquareters
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Usage: Indoor
- Refresh Rate: 3840HZ
- Warranty: 2 Years
- Model Number: P3
- Brightness: 900-1100nits
- Place Of Origin: Shenzhen China
- Pixel Configuration: 1R1G1B
- IC: MBI524
- LED Lamp: Nationstar 2020
- Scan Mode: 32S
- Module Size: 192*192mm
- Highlight: Indoor Advertising LED Display 3840HZ, Customizable P3 LED Display, Customizable Led Advertising Board

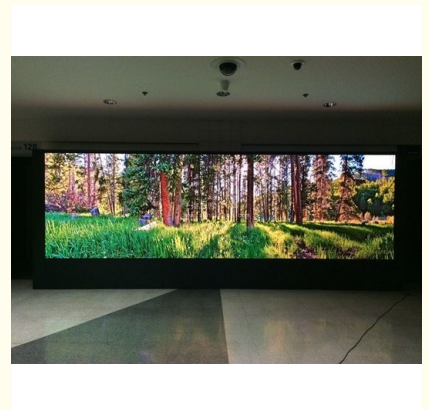

Product Description

Custom P3 Small Pixel Pitch LED Display 3840HZ Refresh Rate For Indoor Advertising

Features :

- 1) High-definition. with 65,536dots/m², it ensures smooth and fluent video effect;
- 2) Super light weight, super slim, easy to transport and less freight cost;
- 3) High strength and precision: die-casting aluminum , tolerance is within 0.15mm, seamless cabinet connection;
- 4) Flat mask surface and view viewing angel;
- 5) no flat cable inside. it's more stable; it's safer to use and also ensures a longer lifespan

Application:

Widely used in stage, concert, live on TV, wedding, conference and commercial advertising etc.

Product Specification:

ITEM	SPECIFICATION
Pixel Pitch	3mm
Pixel Density	111111
Pixel Configuration	1R1G1B
Pixel Type	Black SMD2121
Module Size	192*192mm
Module Resolution	64*64
Cabinet Size	576*576*80mm
Cabinet Weight	9.3kg/pc
Drive Mode	1/16scan, constant current
IC	MBI5124
Brightness	1500CD/SQ.M(adjustable)
Refresh Rate	1200Hz
Frame Frequency	50&60Hz
Grey Scale Level	65536(adjustable)
Color Processing Level	16bit(adjustable)
Color Temperature	3200~9300K(adjustable)
Contrast Ratio	4000:1
Brightness/Color Uniformity	≥97%
Viewing Angle	150°(Horizontal), 120°(Vertical)
Best Viewing Distance	3~50m
Life-Span	100,000 hours
Protection Level	IP20
Power Consumption (Max)	700W/M ²
Power Consumption (Avg)	300W/M ²

Product Show



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen