



High Resolution P4 Indoor LED Video Wall Led Screen For Concerts / Tv Shows

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: SC
- Certification: CCC IP68 CE
- Model Number: Indoor SMD P4
- Minimum Order Quantity: Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box, Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Module Size: 256*128mm
- Brightness: 900-1200nits
- Control Method: Synchronization
- Color: 1R1G1B
- Module Number: Indoor SMD P4
- Led Package: Nationstar SMD 2020
- Warranty: 2 Years
- Pixel Resolution: 64dots(W)*32dots(H)
- Highlight: **High Resolution p4 led video wall, High Resolution Indoor LED Video Wall, P4 led screen for concerts**

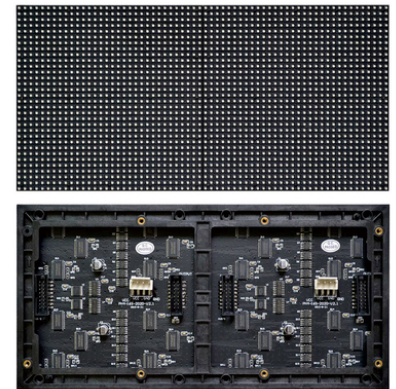

Product Description

High Resolution P4 Indoor Large Led Screens For Concerts / Tv Shows


Product Specification:

Item	Parameter
Unit Module	Model Number
	SF-SS4-16-A
	Module size
	256mm*128mm
	Pixel pitch
	4mm
	Pixels Density
	62500dots/m2
	Pixel configuration
	1R1G1B
	LED Package mode
	NationStar SMD2121
	Pixel resolution
	64dots(W)*32dots(H)
LED Cabinet	Max Power
	18W
	Module thickness
	22mm
	Weight
	0.21kg
	Drive type
	Constant drive
	Scan mode
	1/16
	Port type
	HUB75-A
	Brightness of white balance
	≥1500cd/m2
LED Cabinet	Dimension
	512mm*512mm*
	Monomer Module Number
	8pcs
	Power supply
	5V/40A*200W
	Thermal discharge
	fan 1pcs
	Pixel per cabinet
	256mm*128mm
Power	Best viewing distance
	4M 20M
	Best viewing angle
	110°(W) 110°(H)
	Temperature
	storage:-35°C +85°C
	working:-20°C +50°C
	Relative humidity
	10%-95%
	Thickness
Power	122mm
	Working voltage
	AC220V±10%
	Average Power consumption
Control system	170W/
	Max.Power consumption
	≤480W/
	Current
Main technical parameter	≤20mA(single LED)
	CPU
	Pentium4 or above
	Operation system
Main technical parameter	WIN98/2000/NT/XP/WIN7
	Control method
	Synchronization
	Driving device
Main technical parameter	Constant drive IC
	Refresh frequency
	≥1400HZ
	Grey scale/colors
	4096gray level/16.7M colors
	MTBF
Main technical parameter	≥9000hours
	Power switch
Main technical parameter	Automatic switch
	Display Mode
Main technical parameter	≥800*600/1024*768

Advantage :

- 1) High-definition. with 65,536dots/m2, it ensures smooth and fluent video effect;
- 2) Super light weight, super slim, easy to transport and less freight cost;
- 3) High strength and precision: die-casting aluminum , tolerance is within 0.15mm, seamless cabinet connection;
- 4) Flat mask surface and view viewing angel;
- 5) no flat cable inside. it's more stable; it's safer to use and also ensures a longer lifespan

Project Show:

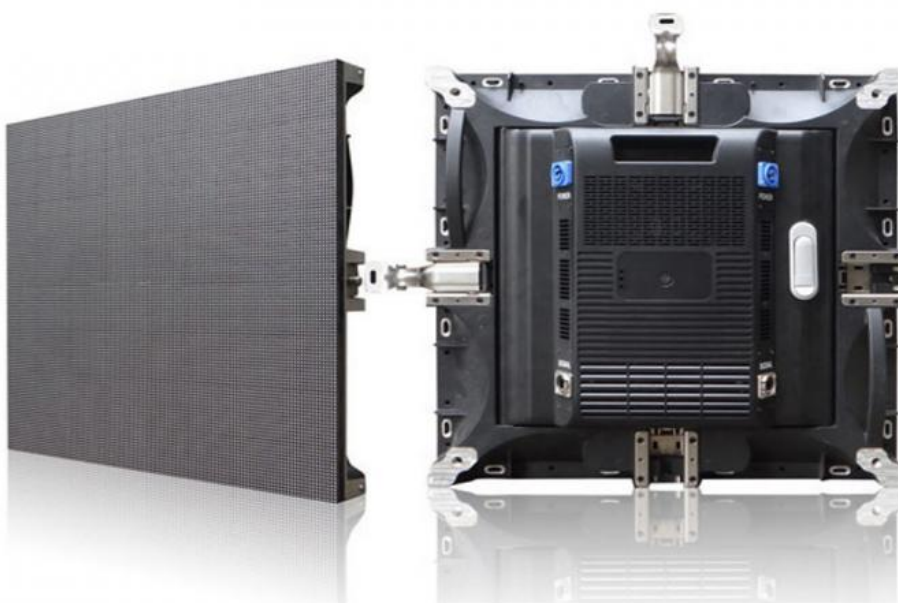

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen