




80W Indoor And Outdoor Led Display P2 P2.5 P3 P4 P5 P6 P8 P10 P16

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: SC
- Certification: CCC IP68 CE
- Model Number: indoor p2
- Minimum Order Quantity: Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box, Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T
- Supply Ability: 5000 Square Meter/Square Meters per Month

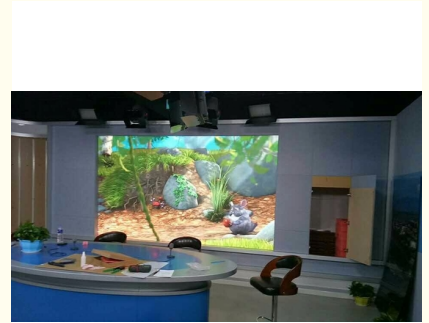

Product Specification

- Module Size: 128*128mm
- Brightness: 900-1200nits
- Control Method: Synchronization
- Color: 1R1G1B
- Module Number: Indoor P2
- Led Package: Nationstar SMD 1515
- Warranty: 2 Years
- Pixel Resolution: 64dots(W)*64dots(H)
- Highlight: Indoor And Outdoor Led Display P2,
Indoor And Outdoor Led Display P2.5,
80W Indoor led screen



Product Description

indoor and outdoor led display module p2,p2.5,p3,p4,p5,p6,p8,p10,p16

Product Specification:

Item	Specification Parameter
Pixel type	Real full color
Pixel color	RGB
Module size	128*128mm
Pixel led	SMD1010
Pixels pitch	2mm
Resolution rate	64*64mm
Driving way	1/32
Driving IC	MBI5024
Working voltage	DC5V
Power	80W
Working temperature	-30°C - +50°C

2.Screen Specification

Item	Specification
Material	Aluminum
Color	Black
Size	512*512mm
Resolution rate	256*256
Module quantity	4*4
Density	250,000dots/m2
White balance luminance	1300cd/m2
Color temperature	6500
Horizontal view angel	140
Vertical view angel	120
Protection grade	Before/after: IP31
Non-Flatness	<1mm
Module interval	<1mm
Weight	3.8kg
Maximal power/m2	380W
Frame frequency	≥60Hz/s
Refresh frequency780	780Hz
Gray grade	1024*1024*1024Grade/1073741824
Luminance adjusted	256 grade by auto-optic/color &8 grade by hand
Input signal	RF,S-video,RGB,RGBHV,YUV,YC&Composition,etc
MTBF	>5000h
Life-span	>100000h
Speckles rate	<0.0001

Advantage :

- 1.Easy to maintain, High resolution, Good contract, Less Weight, easy to install. Widely used as the information billboard in Airport, Railway station, and big shopping mall, concert and ect.
- 2.The brightness of indoor LED signs is adjustable so as to ensure different environment.
- 3.Indoor SMD LED signs include PH4mm, PH5mm, PH6mm, PH7.62mm, PH10mm and PH12mm. P6mm and P7.62mm are most popular pixel pitch.
- 4.We make best design with high cost- efficiency according to the actual needs of our customers and we can offer OEM service as well.
- 5.We produce advertising LED display, rental LED display, traffic LED display, highway LED display, stadium LED display, curve shape LED display, text information LED display and so on.

Project Show:


Related Products




P3 Indoor led display




p4 Led display



p6 Led display

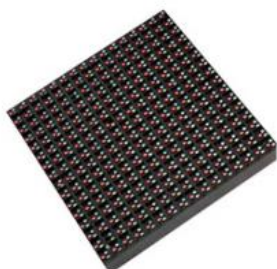

P10 led display



P12 Led display



P16 led display



P8 led display



P20 led display



P5led display

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen