




20 Watt Indoor LED Video Wall HD Full Color Pixel Pitch P2.0 Pixel Pitch

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: Rosh IP65 CE
- Model Number: p2.0
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month

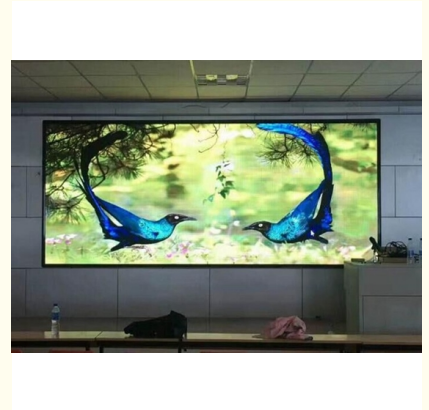

Product Specification

- Product Name: P2.0
- Module Size: 256*128mm
- Weight: 1.5kg
- Scan Mode: 1/32
- Package Mode: Nationstar SMD1010
- Module Thickness: 22mm
- Highlight: 20 Watt Indoor LED Video Wall,
P2.0 Indoor LED Video Wall,
20 Watt indoor led video screen

for more products please visit us on sol-colur.com

Product Description

20W Led Advertising Signs Board High Refresh Rate HD Full Color Pixel Pitch 2mm

Product Description:

- 1) die-casting aluminum panel, to achieve high precision process to seamless and good thermal dissipation; to support the entire screen of any size to a truly seamless splicing.
- 2) convenient in transporting and installing & saving labor cost.
- 3) reliable quality, advanced and mature technology, compliant with industrial standards and technology developing trend.
- 4) high resolution and definition of screen image, clear and non-flash screen image

Product Parameters:

--

Unit Module	Item	Parameter
	Model Number	SF-TS2.0-32S-A
	Module size	256*128mm
	Pixel pitch	2mm
	Pixels Density	250000dots/m2
	Pixel configuration	1R1G1B
	Package mode	NationstarSMD1010
	Pixel resolution	128dots(W)*64dots(H)
	Max Power consumption	20W
	Module thickness	22mm
	Weight	1.5kg
	Drive type	Constant drive
	Scan mode	32S
	Port type	HUB75-A
	Brightness of white balance	≥1000cd/m2
Cabinet	Dimension	512mm*512mm
	Quanty of Module	8pcs
	Power supply	5V/60A*2pcs
	Thermal discharge	fan2pcs
	Pixel per cabinet	256*256mm
	Best viewing distance	2.5M 10M
	Best viewing distance	110°(W) 110°(H)
	Temperature	storage:-35℃ +85℃ working:-20℃ +50℃
	Opration humidity	10%-95%
	Thickness	55mm
Power	Working voltage	AC220V±10%
	Average Power consumption	300W/
	Max.Power consumption	≤1000W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4or above P4 or can more
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
Main technical parameter	Driving device	Constant currentdriver IC
	Refresh frequency	≥1080HZ
	Grey scale/colors	4096gray levels/color(RGB)/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch

Advantage:

1. fast changing frame speed, nanosecond response time
2. point by point correction, uniform luminance chromaticity
3. Intelligent lumnainance adjustment, automatic adaptation environment

- 4. radio color gamut, color temperature intelligently adjustable
- 5. good color blending: Display clear, exquisite, nature color video even at close distance

Project Show:



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen