



## SMD3535 Outdoor Fixed LED Display 10mm IP65 Led Screen Waterproofing

### Our Product Introduction


#### Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: IP65, RoHS, CE
- Model Number: P10
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE, FLIGHT CASE
- Delivery Time: 15-20 days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



#### Product Specification

- Module Size: 320mm\*160mm
- Pixel Resolution: 32dots(W)\*16dots(H)
- Max Power: 35W
- Pixel Pitch: 10mm
- Weight: 0.37kg
- Highlight: 10mm IP65 Led Screen,  
IP65 Led Screen Waterproofing,  
SMD3535 Outdoor Fixed LED Display

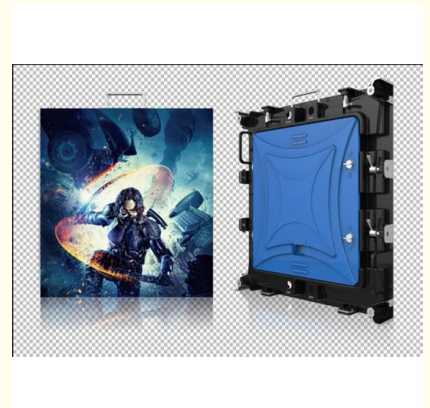

## Product Description

SMD3535 35W Outdoor Advertising LED Display Pixel Pitch 10mm IP65 Waterproof

### Product Description

1. Large viewing angle, both H/V can reach 110 degree; getting vivid effect within any position of the viewing range.
2. Excellent visual effect, better viewing effect for text and graphic or video.
3. High contrast ratio and good evenness, high uniformity.
4. Fit for the outdoor fixed commercial applications such as shopping mall, mobile truck, single/double pole mounted, wall mounted
5. High contrast ratio and good evenness, high uniformity, without mosaic.

### P10 outdoor full-color technology parameters

Item	Parameter
sUnit Module	Model Number
	SF-SS10-4S-A
	Module size
	320mm*160mm
	Pixel pitch
	10mm
	Pixels Density
	10000dots/m2
	Pixel configuration
	1R1G1B
	Package mode
	SMD3535
	Pixel resolution
	32dots(W)*16dots(H)
LED Cabinet	Max Power
	35W
	Module thickness
	22mm
	Weight
	0.37kg
	Drive type
	Constant drive
	Scan mode
	1/4
	Port type
	HUB75-A
	Brightness of white balance
	≥6800 7200cd/m2
LED Cabinet	Dimension
	960mm*960mm*100 mm
	Monomer Module Number
	18pcs
	Power supply
	5V/40A*4pcs
	Thermal discharge
	fan 2pcs
	Pixel per cabinet
	96mm*96mm
Power	Best viewing distance
	8M 15M
	Best viewing angle
	120°(W) 110°(H)
	Temperature
	storage:-35°C +85°C working:-20°C +50°C
Power	Relative humidity
	10%-95%
	Thickness
	122mm
	Working voltage
Power	AC220V±10%
	Average Power consumption
	180W/
	Max Power consumption
Control system	≤480W/
	Current
	≤20mA(single LED)
	CPU
Control system	Pentium4 or above P4
	Operation system
	WIN98/2000/NT/XP/WIN7
Main technical parameter	Control method
	Synchronization
	Driving device
	Constant drive IC
	Refresh frequency
	≥1200HZ
Main technical parameter	Grey scale/colors
	4096gray level/16.7M colors
	MTBF
	≥9000hours
	Power switch
Main technical parameter	Automatic switch
	Display Mode
	≥800*600/1024*768

### Features:

1. IP65 Waterproof protect.
2. Multi-Control systems can be Optional.
3. High Brightness and Refresh Rate.
4. Energy Saving.
5. High Uniformity & Contract.
6. Efficient After-sales.
7. Certification with CE, ROHS, IP65

### Project Show:



**SOL COLUR**  **SHENZHEN SOL COLUR DISPLAY CO.,LTD**



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,  
Shenzhen