




High Definition Led Rental Screen P3 P4 P5 Led Display Synchronization Control

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: FCC CE IP65
- Model Number: p5
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month

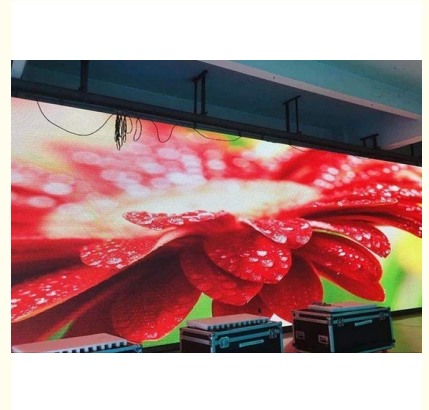

Product Specification

- Product Name: P5
- Pixel Pitch: 5mm
- Weight: 0.21kg
- Pixel Density: 40000 Dots/m2
- Package Mode: Nationstar SMD 2121
- Highlight: **P5 Led Display Synchronization Control, Led Rental Screen Synchronization Control , High Definition P5 Led Display**

for more products please visit us on sol-colur.com

Product Description

Indoor 5mm high definition led video wall full color p3 p4 p5 rental led screen

Detailed Product Description:

Module size:	320*160mm	Brightness:	900-1000nits
Control method:	Synchronization	Color:	1R1G1B
Module number:	Indoor P5	Package mode:	Nationstar SMD2121
Warranty:	2 Years	Pixel resolution:	32dots(W)*32dots(H)

Product Parameters:

Unit Module	Item	Parameter
	Model Number	SF-TS5.0-16S-A
	Module size	320mm*160mm
	Pixel pitch	5mm
	Pixels Density	40000dots/m2
	Pixel configuration	1R1G1B
	Package mode	Nationstar SMD2121
	Pixel resolution	32dots(W)*32dots(H)
	Max Power	25W
	Module thickness	14.27mm
	Weight	0.21kg
	Drive type	Constant drive
	Scan mode	1/16
	Port type	HUB75-A
LED Cabinet	Brightness of white balance	≥1600cd/m2
	Dimension	640mm*640mm*
	Monomer Module Number	16pcs
	Power supply	5V/40A*2pc
	Thermal discharge	fan 2pcs
	Pixel per cabinet	128mm*128mm
	Best viewing distance	5M 30M
	Best viewing angle	110°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
Power	Relative humidity	10%-95%
	Thickness	85mm
	Working voltage	AC220V±10%
	Average Power consumption	500W/
Control system	Max.Power consumption	≤1180W/
	Current	≤20mA(single LED)
	CPU	Pentium4 or above P4 or more
	Operation system	WIN98/2000/NT/XP/WIN7
Main technical parameter	Control method	Synchronization
	Driving device	Constant drive IC
	Refresh frequency	≥1080HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch

Advantage:

- 1.Low attenuation,high gray level,good stability,anti-static
- 2.Ultra high brightness,low attenuation,high reliability and weather ability.
- 3.Large viewing angle and smooth displaying provide excellent visual effect from every angle.
- 4.High refresh rate, high gray scale, ghost-canceling, low power consumption, and dot-by-dot-calibration.

Project Show:



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen