



High Contrast P10 Outdoor Led Display Board Excellent Visual Effect

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: CCC, RoHS, CE
- Model Number: P10
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE, FLIGHT CASE
- Delivery Time: 15-20 days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Module Size: 320mm*160mm
- Color: Black
- Pixel Pitch: 10mm
- Weight: 0.37kg
- Scan Mode: 1/4
- Highlight: High Contrast Outdoor Led Display Board, P10 Led Display Excellent Visual Effect, High Contrast P10 Led Display

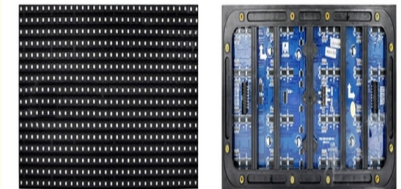

Module size : 320mm*160mm

Product Description

High Brightness P10 Outdoor Led Display Board Pixel Pitch 10mm Large Viewing Angle

Product Description

1. High contrast ratio and good evenness, high uniformity, without mosaic.
2. Large viewing angle, both H/V can reach 110 degree; getting vivid effect within any position of the viewing range.
3. Excellent visual effect, better viewing effect for text and graphic or video.
4. Fit for the outdoor fixed commercial applications such as shopping mall, mobile truck, single/double pole mounted, wall mounted.
5. Resist of the high temperature and antioxidation.

P10 outdoor technology parameters

Item	Parameter
sUnit Module	Model Number
	SF-SS10-4S-A
	Module size
	320mm*160mm
	Pixel pitch
	10mm
	Pixels Density
	10000dots/m2
	Pixel configuration
	1R1G1B
	Package mode
	SMD3535
	Pixel resolution
	32dots(W)*16dots(H)
LED Cabinet	Max Power
	35W
	Module thickness
	22mm
	Weight
	0.37kg
	Drive type
	Constant drive
	Scan mode
	1/4
	Port type
	HUB75-A
	Brightness of white balance
	≥6800 7200cd/m2
LED Cabinet	Dimension
	960mm*960mm*100 mm
	Monomer Module Number
	18pcs
	Power supply
	5V/40A*4pcs
	Thermal discharge
	fan 2pcs
	Pixel per cabinet
	96mm*96mm
LED Cabinet	Best viewing distance
	8M 15M
	Best viewing angle
	120°(W) 110°(H)
	Temperature
LED Cabinet	storage:-35°C +85°C
	working:-20°C +50°C
	Relative humidity
	10%-95%
	Thickness
Power	122mm
	Working voltage
	AC220V±10%
	Average Power consumption
	180W/
Power	Max Power consumption
	≤480W/
	Current
	≤20mA(single LED)
	CPU
Control system	Pentium4 or above P4
	Operation system
	WIN98/2000/NT/XP/WIN7
Control system	Control method
	Synchronization
	Driving device
Main technical parameter	Constant drive IC
	Refresh frequency
	≥1200HZ
	Grey scale/colors
	4096gray level/16.7M colors
	MTBF
Main technical parameter	≥9000hours
	Power switch
	Automatic switch
Main technical parameter	Display Mode
	≥800*600/1024*768

Features:

1. fast installation&dismantle.
2. High Brightness and Refresh Rate.
3. Energy Saving.
4. High Uniformity & Contrast.
5. Efficient After-sales.
6. Certification with CE, RoHS, CCC

Project Show:



SOL COLUR  **SHENZHEN SOL COLUR DISPLAY CO.,LTD**

 +86 13751136904

 chenhao@sol-colour.com

 sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen