




48W P2.6 Led Screen Stage Backdrop , Concert Led Screen AC 220V 100mm Thickness

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: 3C Rosh FCC
- Model Number: p2.6
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month

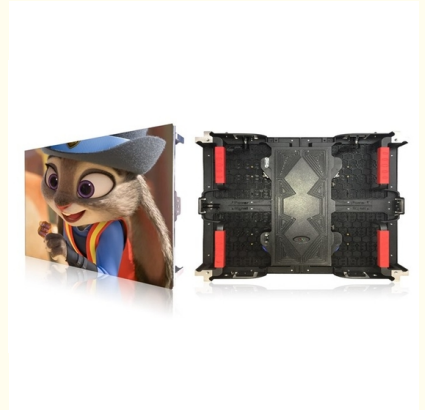

Product Specification

- Product Name: P2.6
- Pixel Pitch: 2.6mm
- Scan Mode: 32S
- Thickness: 100mm
- Pixel Configuration: 1R1G1B
- Highlight: 100mm Thickness Led Screen,
48W Concert Led Screen,
P2.6 Led Screen Stage Backdrop



Product Description

P2.6 stage background led display module size 250*250mm led display

Detailed Product Description:

Module size:	250*250mm	Thickness:	100mm
Control method:	Synchronization	Color:	1R1G1B
Module number:	Stage P2.6	Package mode:	Nationstar SMD2020
Warranty:	2 Years	Pixel resolution:	90dots(W)*96dots(H)


Product Parameters:

	Item	Parameter
Unit Module	Model Number	SF-TS2.6-32S-A
	Module size	250mm*250mm
	Pixel pitch	2.6mm
	Pixels Density	147456dots/m2
	Pixel configuration	1R1G1B
	Package mode	Nationstar SMD2020
	Pixel resolution	90dots(W)*96dots(H)
	Max Power	48W
	Module thickness	14.75mm
	Weight	0.4kg
	Drive type	Constant drive
	Scan mode	32S
	Port type	HUB75-A
	Brightness of white balance	≥1200cd/m2
Cabinet	Dimension	500mm*500mm
	Monomer Module Number	4pcs
	Power supply	5V/60A*1pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	96mm*96mm
	Best viewing distance	2M 18M
	Best viewing angle	140°(W) 140°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	100mm
Power	Working voltage	AC220V±10%
	Average Power consumption	168W/
	Max.Power consumption	≤560W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4 or can more
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1920HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch

Advantage:

1. Best equality, have the excellent consistency of light
2. To pictures and character, have clear, exquisite and real display effect
3. High intensity and can be adjusted, so can meet the request of the customers according the application environment.
4. The dual channel energy saving mode with 3.8V power supply is adopted, and the switching power efficiency is more than 90%.

Project Show:

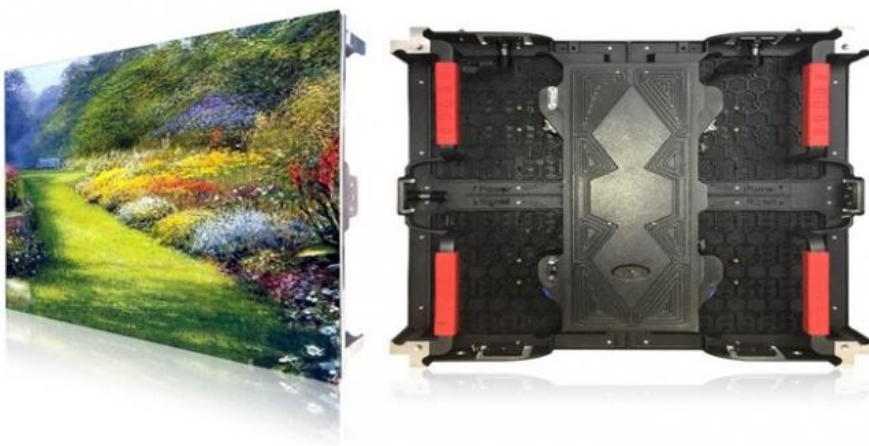

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen