



1R1G1B Stage Led Screen , P3.91 Led Video Display Panels High Resolution

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: EMC IP65 FCC
- Model Number: p3.91
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month



Product Specification

- Product Name: P3.91
- Pixel Pitch: 3.91mm
- Scan Mode: 16S
- Thickness: 100mm
- Pixel Configuration: 1R1G1B
- Highlight: **P3.91 Led Video Display Panels, High Resolution Stage Led Screen, 1R1G1B Stage Led Screen**

for more products please visit us on sol-colur.com

Product Description

P3.91 stage background led display high resolution 64*64 led display

Detailed Product Description:

| | | | |
|-----------------|-----------------|-------------------|---------------------|
| Module size: | 250*250mm | Thickness: | 100mm |
| Control method: | Synchronization | Color: | 1R1G1B |
| Module number: | Stage P3.91 | Package mode: | Nationstar SMD1921 |
| Warranty: | 2 Years | Pixel resolution: | 64dots(W)*64dots(H) |


Product Parameters:

| Item | Parameter |
|--------------------------|--|
| Unit Module | Model Number |
| | SF-SS3.91-16S-A |
| | Module size |
| | 250mm*250mm |
| | Pixel pitch |
| | 3.91mm |
| | Pixels Density |
| | 65536dots/m2 |
| | Pixel configuration |
| | 1R1G1B |
| | Package mode |
| | Nationstar SMD1921 |
| | Pixel resolution |
| Cabinet | 64dots(W)*64dots(H) |
| | Max Power |
| | 38W |
| | Module thickness |
| | 13.41mm |
| | Weight |
| | 0.58kg |
| | Drive type |
| | Constant drive |
| | Scan mode |
| | 16S |
| | Port type |
| | Hard connection of 4 sets of signals |
| Power | Brightness of white balance |
| | ≥4300cd/m2 |
| | Dimension |
| | 500mm*500mm |
| | Monomer Module Number |
| | 4pcs |
| | Power supply |
| | 5V/60A*1pcs |
| | Thermal discharge |
| | fan 2pcs |
| Control system | Pixel per cabinet |
| | 128mm*128mm |
| | Best viewing distance |
| | 10M 30M |
| | Best viewing angle |
| Main technical parameter | 110°(W) 110°(H) |
| | Temperature |
| | storage:-35°C +85°C working:-20°C +50°C |
| | Relative humidity |
| | 10%-95% |
| Power | Thickness |
| | 100mm |
| | Working voltage |
| | AC220V±10% |
| Control system | Average Power consumption |
| | 200W/ |
| | Max.Power consumption |
| | ≤400W/ |
| Main technical parameter | Current |
| | ≤20mA(single LED) |
| | CPU |
| | Pentium4 or above P4 or can more |
| Control system | Operation system |
| | WIN98/2000/NT/XP/WIN7 |
| | Control method |
| Main technical parameter | Synchronization |
| | Driving device |
| | Constant drive IC |
| | Refresh frequency |
| | ≥1200HZ |
| Main technical parameter | Grey scale/colors |
| | 4096gray level/16.7M colors |
| | MTBF |
| Main technical parameter | ≥9000hours |
| | Power switch |
| | Automatic switch |

Advantage:

- 1.The die casting aluminum box is of high strength, strong toughness and high precision.
- 2.Waterproof - all waterproof performance, withstand rainstorm test, IP65 or above protection.
- 3.High intensity and can be adjusted, so can meet the request of the customers according the application environment.
- 4.Quick - box connection adopts quick lock, arc lock and fast installation speed.

Project Show:

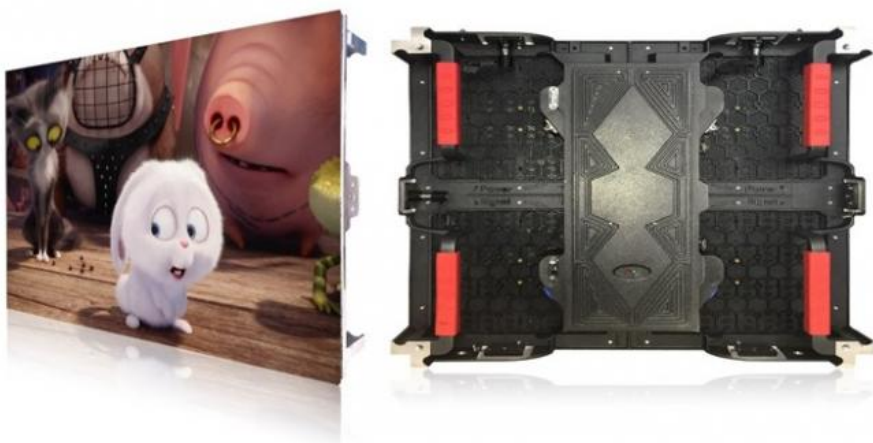

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen