



High Resolution Stage LED Display Full Color P3.91/P4.81 13S Scan Mode 38.5W

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: 3C EMC IP65
- Model Number: p4.81
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month



Product Specification

- Product Name: P4.81
- Pixel Pitch: 4.81mm
- Scan Mode: 13S
- Pixel Configuration: 1R1G1B
- Max Power: 38.5W
- Module Thickness: 20mm
- Highlight: 13S Scan Mode Stage LED Display, Full Color Stage LED Display, P3.91 Stage LED Display

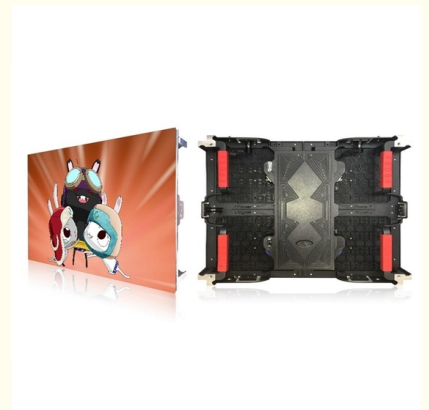

Product Description

High resolution full color rental led display for stage P3.91/P4.81

Detailed Product Description:

Module size:	250*250mm	Dimension:	500*500mm
Control method:	Synchronization	Color:	1R1G1B
Module number:	Stage P4.81	Package mode:	Nationstar SMD2020
Warranty:	2 Years	Pixel resolution:	52dots(W)*52dots(H)


Product Parameters:

	Item	Parameter
Unit Module	Model Number	SF-SS4.81-13S-A
	Module size	250mm*250mm
	Pixel pitch	4.81mm
	Pixels Density	43264dots/m2
	Pixel configuration	1R1G1B
	Package mode	Nationstar SMD2727
	Pixel resolution	52dots(W)*52dots(H)
	Max Power	38.5W
	Module thickness	20mm
	Weight	0.58kg
	Drive type	Constant drive
	Scan mode	13S
	Port type	HUB75-A
	Brightness of white balance	≥4850cd/m2
Cabinet	Dimension	500mm*500mm
	Monomer Module Number	4pcs
	Power supply	5V/60A*1pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	104mm*104mm
	Best viewing distance	2M 14M
	Best viewing angle	110°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	100mm
Power	Working voltage	AC220V±10%
	Average Power consumption	200W/
	Max.Power consumption	≤400W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4 or can more
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1200HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch

Advantage:

1. Excellent flatness and no splicing gap between modules and super thin and light with aluminum cabinet design
2. Excellent flatness and no splicing gap between modules
3. High intensity and can be adjusted, so can meet the request of the customers according the application environment.
4. It is widely used in stage rentals, parties, exhibitions, stadiums and theatres.

Project Show:

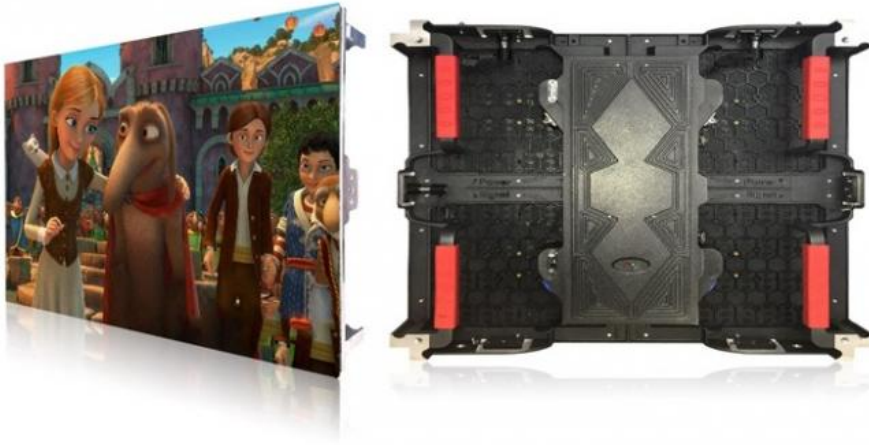

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen