



AC 220V 27W Outdoor Led Display Screen Full Color Led Module P3 P3.91 P5 P6

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: EMC CE FCC
- Model Number: p5
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month



Product Specification

- Product Name: P5
- Module Size: 320*160mm
- Pixel Pitch: 5mm
- Thickness: 122mm
- Weight: 0.37kg
- Highlight: P3 Outdoor Led Display Screen,
P5 Outdoor Led Display Screen,
P3.91 Outdoor Led Display Screen

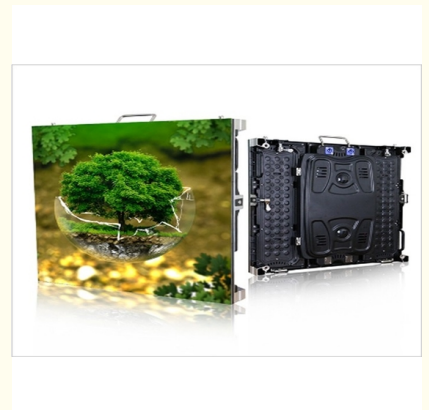

Product Description

Full color led module p3 p3.91 p5 p6 outdoor/indoor rental led display screen cabinet

Detailed Product Description:

Module size:	320*160mm	Brightness:	5500-6000
Control Method:	Synchronization	Color:	1R1G1B
Module number:	Outdoor P5	Package mode:	NationstarSMD2727
Warranty:	2 Years	Pixel resolution:	32dots(W)*64dots(H)

Product Parameters:

Unit Module	Item	Parameter
	Model Number	SF-SS5-8-A
	Module size	320mm*160mm
	Pixel pitch	5mm
	Pixels Density	40000dots/m2
	Pixel configuration	1R1G1B
	Package mode	NationstarSMD2727
	Pixel resolution	32dots(W)*64dots(H)
	Max Power consumption	27W
	Module thickness	22mm
	Weight	0.37kg
	Drive type	Constant drive
	Scan mode	8S
	Port type	HUB75-A
	Brightness of white balance	≥5500~6000cd/m2
Cabinet	Dimension	960mm*960mm*100mm
	Monomer Module Number	36pcs
	Power supply	5V/40A*6pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	96*96mm
	Best viewing distance	5M 15M
	Best viewing distance	120°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	122mm
Power	Working voltage	AC220V±10%
	Average Power consumption	350W/H
	Max.Power consumption	≤1100W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4 or more
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
	Driving device	Constant currentdriver IC
	Refresh frequency	≥1920HZ

Main technical parameter	Grey scale/colors	gray4096 levels of each color(RGB)/16.7M colors
	MTBF	≥100000hours
	Power switch	Automatic switch

Advantage:

1. No mosaic due to excellent flatness and nice uniformity of light-emitting
2. Accurate die-casting cabinet, no gaps between cabinets
3. High contrast rate, white balance consistency, and color display uniformity
4. High refresh rate and high contrast, clear picture without flicker and distortion and high definition to bring us a HD and delicate video pictures.

Project Show:



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen