




20W Max Power Small Pixel Pitch LED Display P1.25 P1.5625 P1.667

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: IP65 3C Rosh
- Model Number: p1.667
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month

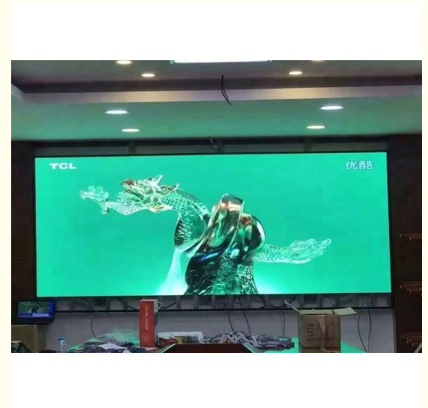

Product Specification

- Product Name: P1.667
- Module Size: 200*150mm
- Pixel Pitch: 1.667mm
- Max Power: 20W
- Thickness: 55mm
- Highlight: 20W Small Pixel Pitch LED Display,
20W small pixel pitch led screen,
Small Pixel Pitch LED Display P1.5625

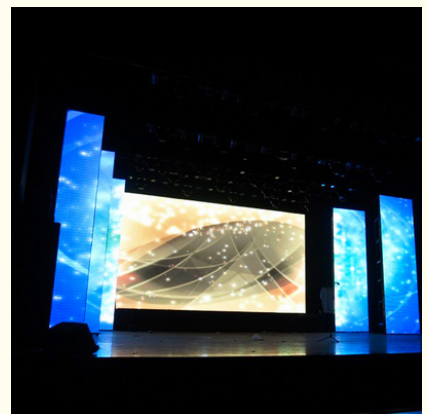

Product Description

20W Max Power Small Pixel Pitch LED Display P1.25 P1.5625 P1.667 2 Years Warranty

Detailed Product Description:

Module size:	200*150mm	Thickness:	55mm
Control Method:	Synchronization	Color:	1R1GB
Module number:	Indoor P1.667	Package mode:	NationstarSMD1010
Warranty:	2 Years	Pixel resolution:	64dots(W)*64dots(H)

Product Parameters:

Unit Module	Item	Parameter
	Model Number	SF-TS1.667-30S-A
	Module size	200mm*150mm
	Pixel pitch	1.667mm
	Pixels Density	360000dots/m2
	Pixel configuration	1R1G1B
	Package mode	NationstarSMD1010
	Pixel resolution	64dots(W)*64dots(H)
	Max Power consumption	20W
	Module thickness	22mm
	Weight	0.4kg
	Drive type	Constant drive
	Scan mode	30S
	Port type	HUB75-A
	Brightness of white balance	≥1000cd/m2
Cabinet	Dimension	400mm*300mm
	Monomer Module Number	6pcs
	Power supply	5V/40A*1pcs
	Thermal discharge	fan1pcs
	Pixel per cabinet	120*90mm
	Best viewing distance	1.7M 10M
	Best viewing distance	140°(W) 140°(H)
	Temperature	storage:-35℃ +85℃ working:-20℃ +50℃
	Relative humidity	10%-95%
	Thickness	55mm
Power	Working voltage	AC220V±10%
	Average Power consumption	300W/H
	Max.Power consumption	≤1000W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4 or more
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
	Driving device	Constant currentdriver IC
	Refresh frequency	≥1920HZ

Main technical parameter	Grey scale/colors	gray4096 levels of each color(RGB)/16.7M colors
	MTBF	≥100000hours
	Power switch	Automatic switch

Advantage:

1. High pixel, fine and vivid image quality, pure and bright colors
2. Wide visual angle display technology and have high refresh.
3. We provides 2 years of warranty and have good after-sales service
4. Dampproof and inflaming retarding design, safe and reliable, long service life
5. Audio and video interface of the system can offer vivid, complete and high quality LED display to TV signal

broadcasting

Project Show:



0

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen