



Full Color Small Pitch Led Display Advertising Led Display Screen P2 P2.5 P3

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: FCC CE Rosh
- Model Number: p2.0
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month



Product Specification

- Product Name: P2.0
- Module Size: 128*128mm
- Pixel Pitch: 2.0mm
- Scan Mode: 32S
- Brightness: 900-1200
- Highlight: Full Color small pitch led display,
P2.5 small pitch led display,
Advertising Led Display Screen P2

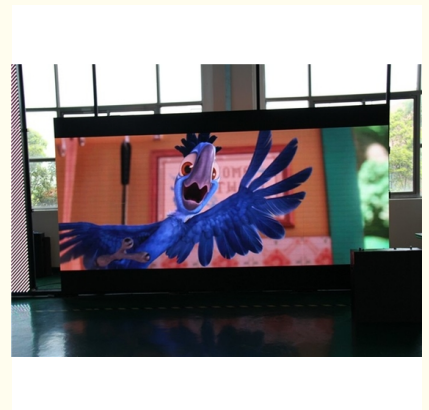

Product Description

Full Color Billboard Advertising Led Display Screen P2 P2.5 P3 Brightness 900-1200

Detailed Product Description:

Module size:	128*128mm	Scan mode:	32S
Control Method:	Synchronization	Color:	1R1GB
Module number:	Indoor P2.0	Package mode:	NationstarSMD1515
Warranty:	2 Years	Pixel resolution:	64dots(W)*64dots(H)

Product Parameters:

Unit Module	Item	Parameter
	Model Number	SF-TS2.0-32S-A
	Module size	128mm*128mm
	Pixel pitch	2.0mm
	Pixels Density	256000dots/m2
	Pixel configuration	1R1G1B
	Package mode	NationstarSMD1515
	Pixel resolution	64dots(W)*64dots(H)
	Max Power consumption	20W
	Module thickness	22mm
	Weight	1.5kg
	Drive type	Constant drive
	Scan mode	32S
	Port type	HUB75-A
	Brightness of white balance	≥1000cd/m2
Cabinet	Dimension	512mm*512mm
	Monomer Module Number	8pcs
	Power supply	5V/60A*2pcs
	Thermal discharge	fan2pcs
	Pixel per cabinet	256*256mm
	Best viewing distance	2.5M 10M
	Best viewing distance	110°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	55mm
Power	Working voltage	AC220V±10%
	Average Power consumption	300W/H
	Max.Power consumption	≤1000W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4 or more
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
	Driving device	Constant currentdriver IC
	Refresh frequency	≥1080HZ

Main technical parameter	Grey scale/colors	gray4096 levels of each color(RGB)/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch

Advantage:

1. High resolution and high definition.
2. We provide 2 years of warranty.
3. LED screen with die-casting aluminum frame design, screen is super light and thin, saving space and costs, fashionable and beautiful
4. Any direction, any size, any shape can be jointed presenting perfect seamless visual effect
5. Adopting die-casting aluminum improves the heat dispersion, prolonging the lifetime of the led display.

Project Show:



0

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen