



P1.5625 Small Pixel Pitch LED Display Module Size 200mm*100mm High Antistatic

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: CE, ROHS, IP65
- Model Number: P1.5625
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE, FLIGHT CASE
- Delivery Time: 15-20 days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Module Size: 200mm*100mm
- Pixel Pitch: 1.5625mm
- Pixel Configuration: 1R1G1B
- Max Power: 25W
- Weight: 0.4kg
- Highlight: P1.5625 Small Pixel Pitch LED Display, Antistatic Small Pixel Pitch LED Display, P1.5625 small pixel pitch led screen

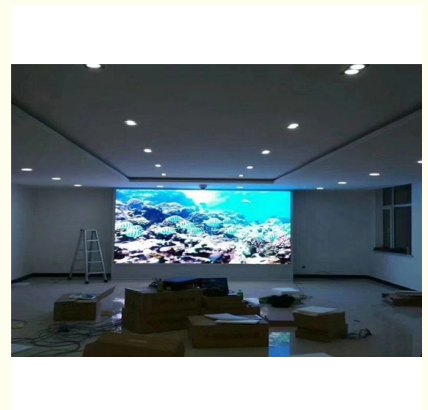

Product Description

P1.5625 Small Pixel Pitch LED Display Module Size 200mm*100mm High Antistatic

Product description

1. Die casting aluminum box with high precision ensures smooth and seamless screen body.
2. P1.5625 HD LED display screen uniform, Clear image and strong sense of hierarchy.
3. Low brightness, high ash, high antistatic and high refresh.

	Item	Parameter
Unit Module	Model Number	SF-TS1.5625-32S-A
	Module size	200mm*100mm
	Pixel pitch	1.5625mm
	Pixels Density	10000dots/m2
	Pixel configuration	1R1G1B
	Package mode	SMD1010
	Pixel resolution	128ots(W)*64 dots(H)
	Max Power	25W
	Module thickness	14.75mm
	Weight	0.4kg
	Drive type	Constant drive
	Scan mode	1/32
	Port type	HUB75-A
	Brightness of white balance	≥1000cd/m2
LED Cabinet	Dimension	400mm*300mm
	Monomer Module Number	16pcs
	Power supply	5V/60A*1pcs
	Thermal discharge	fan 1pcs
	Pixel per cabinet	256mm*192mm
	Best viewing distance	2.5M 10M
	Best viewing angle	140°(W)140°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
Power	Thickness	85mm
	Working voltage	AC220V±10%
	Average Power consumption	500W/
	Max Power consumption	≤1250W/
Control system	Current	≤20mA(single LED)
	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1920HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥10000hours
	Power switch	Automatic switch

Product advantage

1. high reliability, long service life and low maintenance cost.
2. P1.56 display screen can be stitching in any direction, any size and any shape, showing perfect seamless visual effect.
3. The design of die-casting aluminum frame is super light, ultra-thin and saves space. It saves cost and is fashionable and beautiful.
4. Indoor P1.5625 display screen ultra-small spacing, high pixel density of high-definition LED display, suitable for indoor ultra-high-definition close-up viewing display

Project Show:



SOL COLUR  **SHENZHEN SOL COLUR DISPLAY CO.,LTD**

 +86 13751136904

 chenhao@sol-colour.com

 sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen