



SMD2121 Indoor Rental Led Screen P3 High Refresh 192*192 2 Years Warranty

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: sol colur
- Certification: EMC Rosh IP65
- Model Number: p3
- Minimum Order Quantity: 1pieces
- Price: Negotiable
- Packaging Details: Flight Case , Wooden Box , Carton
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters/ per month

Rental LED Display



Product Specification

- Product Name: P3
- Module Size: 192*192mm
- Pixel Pitch: 3mm
- Resolution: 111111 Dots/m2
- Warranty: 2 Years
- Highlight: **P3 Indoor Rental Led Screen , High Refresh Indoor Rental Led Screen**



for more products please visit us on sol-colur.com

Product Description

P3 SMD2121 high refresh 192*192 indoor rental screen led display

Detailed Product Description:

Module size:	192*192mm	Brightness:	900-1100
Control Method:	Synchronization	Color:	1R1G1B
Module number:	Indoor P3	Package mode:	NationstarSMD2121
Warranty:	2 Years	Pixel resolution:	64dots(W)*64dots(H)

Product Parameters:


Unit Module	Item	Parameter
	Model Number	SF-TS3.0-32S-A
	Module size	192mm*192mm
	Pixel pitch	3mm
	Pixels Density	111111dots/m2
	Pixel configuration	1R1G1B
	Package mode	NationstarSMD2121
	Pixel resolution	64dots(W)*64dots(H)
	Max Power consumption	15W
	Module thickness	22mm
	Weight	0.28kg
	Drive type	Constant drive
	Scan mode	32S
	Port type	HUB75-A
	Brightness of white balance	≥1000cd/m2
Cabinet	Dimension	576mm*576mm
	Monomer Module Number	9pcs
	Power supply	5V/60A*1pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	192*192mm
	Best viewing distance	3M 10M
	Best viewing distance	110°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	55mm
Power	Working voltage	AC220V±10%
	Average Power consumption	150W/H
	Max.Power consumption	≤650W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4 or more
	Operation system	WIN98/2000/NT/XP
	Control method	Synchronization
	Driving device	Constant currentdriver IC
	Refresh frequency	≥1080HZ

Main technical parameter	Grey scale/colors	gray4096 levels of each color(RGB)/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch

Advantage:

1. Seamless connection with high flatness and soft image
2. Simple , ultra thin and light design ,easy to install and transport
3. Fanless, zero noise, low power consumption, automatic heat dissipation
4. Exquisite color, clear and natural image with excellent RGB gray scale processing
5. Supporting point-to-point correction, to ensure the color and brightness consistency

Project Show:

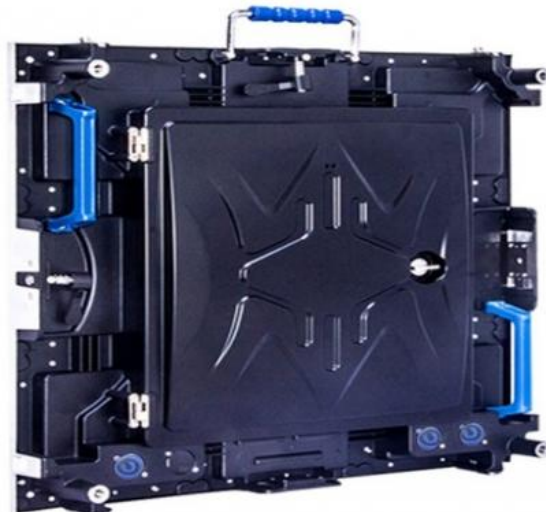

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen

