




P10 360 Degree Led Display Circular Led Screen Floor Standing Anti Ultraviolet

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN
- Brand Name: SC
- Certification: CE,3C,FCC ,ROSH,ISO9001
- Model Number: P10 Cylindrical Screen
- Minimum Order Quantity: 1 Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters per Month

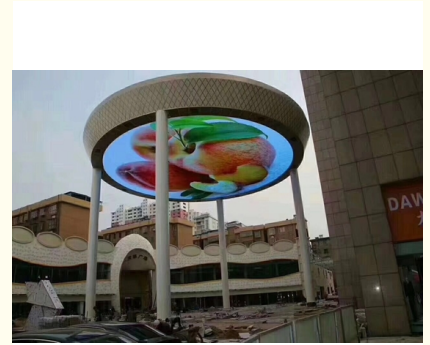


Product Specification

- Encapsulation Of Led: SMD3535
- Protection Level: IP 65
- Pixel Density: 1000dots/
- Brightness Of White Balance: $\geq 7000 \sim 7500 \text{cd/}$
- Average Power Consumption: 350-400W/
- Max.Power Consumption: 1000W/
- Power Supply: 5V/40A*6 Pcs
- MTBF: $\geq 9000 \text{hours}$
- Highlight: **P10 360 Degree Led Display, 360 Degree Led Display Anti Ultraviolet, Circular Led Screen Anti Ultraviolet**



More Images



Product Description

P10 Creative 360 Degree Circular Led Display Floor Standing Anti - Ultraviolet

Product Features:

- 1, Installation: stand on ground or mobile using.
- 2, Viewing angle: Perfect viewing angle with 360 degree.
- 3, Controlling: Both synchronous and asynchronous control way is available for LED balls.
- 5, Effect: The creative appearance and wonderful showing effect attracts most attention during the usage.

Parameter

Unit Module	Item	Parameter
	Model Number	SF-SS5-8-Y
	Module size	40mm*320mm
	Pixel pitch	5mm
	Pixels Density	40000Pixels /m2
	Pixel configuration	1R1G1B
	LED Package mode	NationstarSMD2727
	Pixel resolution	8dots(W)*64dots(H)
	Max Power	14W
	Module thickness	22mm
	Module Weight	0.37kg
	Drive type	Constant drive
	Scan mode	1/8
	Port type	HUB75-A
	Brightness of white balance	≥5500 6000cd/m2
Module pictures		
LED Cabinet	Dimension	960mm*960mm*100 mm
	Monomer Module Number	72pcs
	Power supply	5V/40A*6 pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	192mm*192mm
	Best viewing distance	5M 15M
	Best viewing angle	120°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	122mm
Power	Working voltage	AC220V±10%
	Average Power consumption	1200W/
	Max.Power consumption	≤350W/
	Current	≤20mA(single LED)
Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1200HZ
	Grey scale/colors	4096,16.7M Color 4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768

P3.91 System Connection diagram



Our factory:



Company information

SHENZHEN SOL COLUR DISPLAY CO.,LTD. was established in December 2012,Is a leading LED display applications products and solutions provider,Specialized in LED research and development, manufacturing. Sales and servc,Dedicated to providing high-quality, high-performance LED applications and solutions for professional channel customers and end-users at home and abroad.

Our products have been widely used both at home and abroad. Since its foundation, we have become one of the best LED product and solution providers in the country through our unremitting efforts and have won the industry's highest recognition

The development of the company so far, the sales outlets throughout the country, the export products exported to more than 10 countries and regions, 3C, FCC, CE,IFA, IP65, IP68, IS9001, ROSH.AAA and other qualifications, product testing reports,

patent certificate

From : Elena Duan

What's app no :
+8615019269218

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen