



Synchronization Control Indoor LED Video Wall P4 SMD1921 25 Watt

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN CHINA
- Brand Name: SC
- Certification: CCC IP68 CE ISO9001 ROHS
- Model Number: Indoor SMDP4
- Minimum Order Quantity: Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box, Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meters per Month



Product Specification

- Module Size: 320x160mm
- Pixel Density: 62500dots/
- Encapsulation Of Led: SMD1921
- Module Max Power Consumption: 25W
- Brightness Of White Balance: $\geq 5500 \sim 6000 \text{cd/}$
- Power Supply: 3.8 V/40A*3pcs
- Cabinets Display Resolution: 96*96DOTS
- The Best Viewing Distance: 4M~10M
- Highlight: Indoor LED Video Wall 25 Watt,
Synchronization Control P4 led display,
Indoor LED Video Wall SMD1921

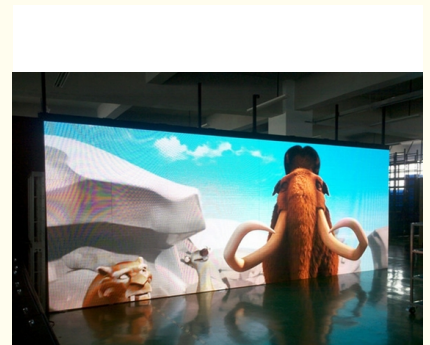

Product Description

Synchronization Color Indoor Full Color LED Display HD Module P4 SMD1921 25 Watt

Features:

Light weight: it can be loaded by one person, quick assembling, quick maintain, reduce. carrying, save costs.
Thin cabinet: the thickness is only 10 CM, the space of the screen is small, and the entire screen will be more beautiful.
Flat screen: smooth surface error is under 0.2cm, it can remove the mosaic phenomenon effectively.
The effect of the display will be more clear and exquisite.
Quick dismounting: adopt fast locking structure connected, firm, quick, beautiful
Low release heat: low noise, low consumption, low cost, excellent thermal design and excellent thermal dispersion.
Full compatible: new structure design which can demand the indoor displays' require.

Product Specification:

	Item	Energy-saving	General
	Model Number	SC-P4(1921)-80*40-4L10S-V1.6	SC-P4(1921)-80*40-4L10S-V1.6
	module size	320x160mm	320x160mm
	pixel pitch	4mm	4mm
	Pixel density	62500dots/	62500dots/
	Pixel configuration	1R1G1B	1R1G1B
	Encapsulation of led	SMD1921	SMD1921
	Module Max Power consumption	25W	33W
	Module Display Resolution	80DOTS(W) * 40DOTS(H)	80DOTS(W) * 40DOTS(H)
	Thickness of a module	16mm	16mm
	Weight of a module	0.58kgs	0.58kgs
	Drive Type	Constant drive (SUM2016)	Constant drive (SUM2028)
	driving mode	1/10 scan	1/10 scan
	HUB type	HUB75	HUB75
Unit Module	brightness of white balance	≥5500~6000cd/	≥5500~6000cd/
	Diecast cabinets size	960x960mm	960x960mm
	Module quantity per cabinet	18pcs	18pcs
	Power supply	3.8V/40A*3pcs	5V/60A*3pcs
	Maintenance mode	back maintenance	back maintenance
	Thermal discharge	fan 2pcs	fan 2pcs
	Cabinets Display Resolution	96*96DOTS	96*96DOTS
	The best viewing distance	4M~10M	4M~10M
	The best viewing angle	H:110° / W:110°	H:110° / W:110°
	Environment temperature	storage:-35°C +85°C working:-20°C +50°C	storage:-35°C +85°C working:-20°C +50°C
LED Cabinet	Operating humidity	10-95% Relative humidity	10-95% Relative humidity
	temperature	100mm	100mm
	operating power	AC220V±10%	AC220V±10%
	Average Power consumption	165W/	325W/
	Max.Power consumption	494W/	975W/
Power	Current	≤20mA(single LED)	≤20mA(single LED)

Control system	CPU	Pentium4 or above P4	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/ WIN7	WIN98/2000/NT/XP/ WIN7
	Control method	synchronization	synchronization
Main Technical parameter	Driving device	Constant drive IC	Constant drive IC
	Refresh frequency	≥1920Hz	≥1920Hz
		4096 level/16.7M colors	4096 level/16.7M colors
	Grey scale/colors		
	lifespan	≥100000 Hours	≥100000 Hours
	Power switch	Automatic switch	Automatic switch

Project Cases:



How to order>>>

Please tell us the details about the LED display and the quantity that you need in the email. After we confirm all the detailed information, we will make a PI (Performa invoice) for you to confirm the order. Once you paid, we deliver it ASAP.

Payment >>>

<2k, 100% payment need to be made in advance after the order is confirmed

>2k, 30% as deposite , and balance before the shipment

Payment terms: T/T ; Western Union ; PAYPAL

Thanks for your payment.

Our factory:



Company information

SHENZHEN SOL COLUR DISPLAY CO.,LTD. was established in December 2012,Is a leading LED display applications products and solutions provider.Specialized in LED research and development, manufacturing. Sales and servic,Dedicated to providing high-quality, high-performance LED applications and solutions for professional channel customers and end-users at home and abroad.

Our products have been widely used both at home and abroad. Since its foundation, we have become one of the best LED product and solution providers in the country through our unremitting efforts and have won the industry's highest recognition

The development of the company so far, the sales outlets throughout the country, the export products exported to more than 10 countries and regions, 3C, FCC, CE,IFA, IP65, IP68, IS9001, ROSH.AAA and other qualifications, product testing reports, patent certificate

From : Elena Duan
What's app no : +8615019269218

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen