



ROHS Certified Roadside Led Display Outdoor Waterproof Led Advertising Panels 10mm

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN,CHINA
- Brand Name: SOL COLUR
- Certification: IP65,ROHS,EMC,CCC
- Model Number: P10
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON,WOODEN CASE FLIGHT CASE
- Delivery Time: 15-20days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Module Size: 320mm*160mm
- Pixel Pitch: 10mm
- Max Power: 35W
- Weight: 0.37kg
- Scan Mode: 1/4
- Highlight: **ROHS Certified Roadside Led Display, Outdoor Waterproof Led Advertising Panels 10mm**
,
ROHS Outdoor Waterproof Led Advertising Panels

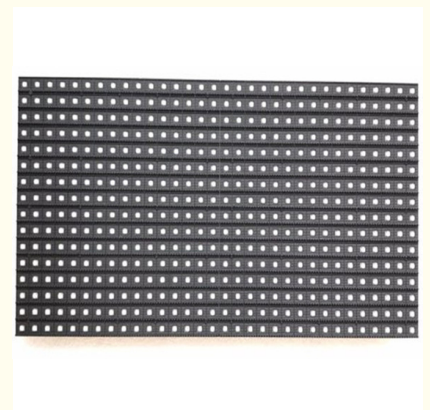

More Images



for more products please visit us on sol-colur.com

Product Description

Scanmode 1/4 Led Outdoor Advertising Screens , Led Video Panels Pixel Pitch 10mm

Product description

1. High performance, cost effective.
2. Low power consumption, energy saving and friendly use.
3. With high and adjustable brightness, it can fully satisfy various customer requirements.
4. Long lifespan up to 100,000 hours.
5. It can achieve single-dot and single-lamp maintenance with relatively low maintenance cost and easy maintenance

P10 outdoor technology parameters

	Item	Parameter
sUnit Module	Model Number	SF-SS10-4S-A
	Module size	320mm*160mm
	Pixel pitch	10mm
	Pixels Density	10000dots/m2
	Pixel configuration	1R1G1B
	Package mode	SMD3535
	Pixel resolution	32dots(W)*16dots(H)
	Max Power	35W
	Module thickness	22mm
	Weight	0.37kg
	Drive type	Constant drive
	Scan mode	1/4
	Port type	HUB75-A
	Brightness of white balance	≥6800 7200cd/m2
LED Cabinet	Dimension	960mm*960mm*100 mm
	Monomer Module Number	18pcs
	Power supply	5V/40A*4pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	96mm*96mm
	Best viewing distance	8M 15M
	Best viewing angle	120°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
Power	Thickness	122mm
	Working voltage	AC220V±10%
	Average Power consumption	180W/
	Max Power consumption	≤480W/
Control system	Current	≤20mA(single LED)
	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1200HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768

Product Features :

1. Color correction, color stabilization;
2. High brightness and definition, energy-saving, environment friendly;
3. The display adopts high refresh rate, no highlights, perfectly meet the requirements of video image;
4. Easy operation and control, simple installation and maintainence.

Project Show:



SOL COLUR  **SHENZHEN SOL COLUR DISPLAY CO.,LTD**

 +86 13751136904

 chenhao@sol-colour.com

 sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen