



## SMD 2727 Outdoor Rental LED Display 38.5W Pixel Pitch 4.81mm 1/13 Scan Mode

### Our Product Introduction


#### Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: CE, ROHS, FCC
- Model Number: P4.81
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE, FLIGHT CASE
- Delivery Time: 15-20 Days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



#### Product Specification

- Pixel Pitch: 4.81mm
- Module Size: 250mm\*250mm
- Module Thickness: 20mm
- Scan Mode: 1/13
- Power Supply: 5V60A\*1pcs
- Pixel Configuration: 1R1G1B
- Highlight: 38.5W Pixel Pitch Rental LED Display, 4.81mm Rental LED Display

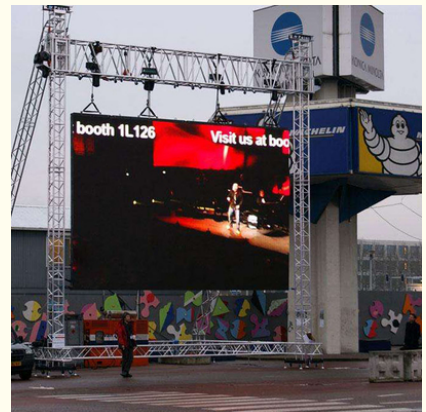

for more products please visit us on [sol-colur.com](http://sol-colur.com)

## Product Description

SMD 2727 Outdoor Rental LED Display 38.5W Pixel Pitch 4.81mm 1/13 Scan Mode

### Product Description

- 1.PH4.81mm SMD Indoor LED Display Module, with power cables;
- 2.LED modules can work with Nova, Linsn, Colorlight,Xixun LED Control Card ,etc.
3. High precision module suite, to achieve high-quality seamless effect.
4. High quality LED lamp black, with a black mask, the contrast up to 2000: 1.
- 5.High refresh rate,the display is stable, no ripples, no flicker, display real and natural.
- 6.The products based on CE, FCC,ROHS Certification.

### OUTDOOR P4.81 SMD 3IN1 TECHNICAL PARAMETERS

	Item	Parameter
	Model Number	SF-SS4.81-13S-A
Unit Module	Module size	250mm*250mm
	Pixel pitch	4.81mm
	Pixels Density	43264 dot/m2
	Pixel configuration	1R1G1B
	Package mode	Nationstar SMD2727
	Pixel resolution	52dots(W)*52 dots (H)
	Max Power	38.5W
	Weight	0.58kg
	Drive type	Constant drive
	Scan mode	1/13
	Port type	HUB75-A
	Brightness of white balance	≥4850cd/m2
LED Cabinet	Dimension	500mm*500mm
	Monomer Module Number	4pcs
	Power supply	5V/60A*1pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	104mm*104mm
	Best viewing distance	2M 14M
	Best viewing angle	110°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
	Thickness	100mm
Power	Working voltage	AC110 220V±10%
	Average Power consumption	200W/
	Max Power consumption	<400W/
	Current	<20mA(single LED)
Control system	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical	Driving device	Constant drive IC
	Refresh frequency	>1920HZ
	Grey scale/colors	16384gray level/16.7M colors

parameter	MTBF	>9000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768

**Features:**

- 1.High brightness and definition, energy-saving, environment friendly
2. To pictures and character, have clear, exquisite and real display effect.
3. Excellent visual effect, better viewing effect for text and graphic or video.
- 4.Can repair each led lamps, so the cost of maintain is lower, and easy to repair.
5. Long lifespan up to 9,000 hours.

**Project Show:**



**SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD**

+86 13751136904

chenhao@sol-colour.com

sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen