




## 27.5W Outdoor SMD LED Display Pixel Configuration 1R1G1B Module Thickness 22mm

### Our Product Introduction

#### Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: IP65, ROHS, CE
- Model Number: P8
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE FLIGHT CASE
- Delivery Time: 15-20 Days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month

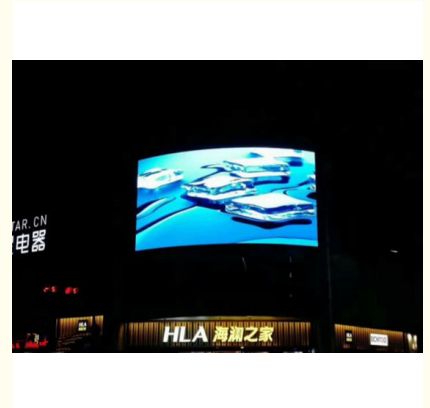

#### Product Specification

- Pixel Pitch: 4mm
- Module Size: 320mm\*160mm
- Pixel Configuration: 1R1G1B
- Max Power: 27.5W
- Weight: 0.37kg
- Scan Mode: 1/4
- Highlight: 22mm Outdoor SMD LED Display, Pixel Configuration Outdoor SMD LED Display, 1R1G1B Outdoor SMD LED Display



## Product Description

27.5W Outdoor SMD LED Display Pixel Configuration 1R1G1B Module Thickness 22mm

Description:

- 1.Cabinet structure is with light weight and standardization: Adopting high strength metal process, achieving high precision, light weight and other outstanding features; Uniform image picture with high refresh frequency and gray level to realize the vivid effect.
- 2.High bearing strength and fast installation through the connecting plate. With flexible installation, such as embedded installation, post mounting, etc. It would not occur the extrusion and deformation phenomenon between the modules when the display is working under the high and low temperatures.
- 3.Achieve low heat, low noise and low radiation: Through the good structure design, ensure Low decibel value and stable performance when it works in the normal temperature; Passed the EMC test.
- 4.High voltage thermal pull out plug in application: It will not strike fire during pull out the plug process, and fully accomplish the phenomenon such as waterproof, anti-interference, corrosion resistance, etc.
- 5.The module cases with the handle for installation and maintenance, the mask is not reflective, and resistance to ultraviolet ray, do not fade for 5 years, contrast to 1000: 1, cabinet flatness coefficient < 0.5 mm.

**Project Show:**



**SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD**



+86 13751136904



[chenhao@sol-colour.com](mailto:chenhao@sol-colour.com)



[sol-colour.com](http://sol-colour.com)

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen