




SMD 3535 Outdoor Led Advertising Screens 1/4 Scan Mode Light Weight Waterproof

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: CE, FCC, IP65
- Model Number: P10
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE FLIGHT CASE
- Delivery Time: 15-20 days
- Payment Terms: L/C, D/A, D/P, T/T, , Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month

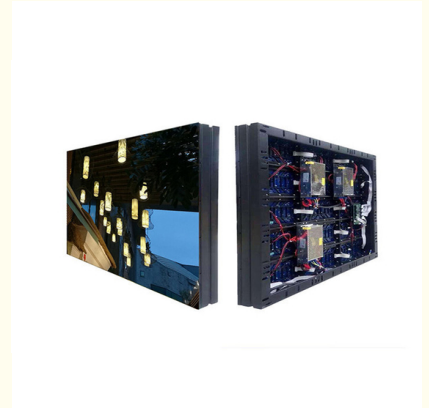

Product Specification

- Module Size: 320*160
- Pixel Pitch: 10mm
- Max Power: 35W
- Weight: 0.37kg
- Scan Mode: 1/4
- Module Thickness: 22mm
- Highlight: SMD 3535 Outdoor Led Advertising Screens, Waterproof Outdoor Led Advertising Screens, Light Weight Outdoor Led Advertising Screens



More Images



for more products please visit us on sol-colur.com

Product Description

SMD 3535 Outdoor Advertising LED Display 1/4 Scan Mode Module Size 320*160

Product Description

- 1.Patented LED SMD3535 are used for this model, which guarantee a wide viewing angle(>110°H;>120°W) and a nice flatness appearance. Brightness>6500CD/SQM.
- 2.light weight, Graceful and concise appearance; with Protection grade IP65 Suitable for all outdoor working environment.
- 3.Fast locks at the four sides of the cabinet, easy assembly; and be piled up and be hoisted.
- 4.Waterproof connectors, safe and steady.
- 5.Wire all adopt the national standard of pure copper wire, led screen has throughed the CCC, CE ,IP65,EMC, ROHS and CCC,certification

P10 outdoor technology parameters

	Item	Parameter
sUnit Module	Model Number	SF-SS10-4S-A
	Module size	320mm*160mm
	Pixel pitch	10mm
	Pixels Density	10000dots/m2
	Pixel configuration	1R1G1B
	Package mode	SMD3535
	Pixel resolution	32dots(W)*16dots(H)
	Max Power	35W
	Module thickness	22mm
	Weight	0.37kg
	Drive type	Constant drive
	Scan mode	1/4
	Port type	HUB75-A
	Brightness of white balance	≥6800 7200cd/m2
LED Cabinet	Dimension	960mm*960mm*100 mm
	Monomer Module Number	18pcs
	Power supply	5V/40A*4pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	96mm*96mm
	Best viewing distance	8M 15M
	Best viewing angle	120°(W) 110°(H)
	Temperature	storage:-35°C +85°C working:-20°C +50°C
	Relative humidity	10%-95%
Power	Thickness	122mm
	Working voltage	AC220V±10%
	Average Power consumption	180W/
	Max Power consumption	≤480W/
Control system	Current	≤20mA(single LED)
	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1200HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768

Product Features:

- 1.color spots or picture shade will be removed through the adjustment of brightness and color by each independent pixel
- 2, adopted with self developed steel structure and special kits will be kept in good flatness and smoothness
- 3, strict water proof testing by Ip65
- 4, according to environmental changes the brightness can be adjusted automatically for energy saving
- 5, special PVC kits are adopted to protect from corrosion according to coastal weather



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen