



35W P10 Outdoor Led Screen SMD3535 Led Video Wall Panels 1/4 Scan Mode

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: FCC, IP65, CCC
- Model Number: P10
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE FLIGHT CASE
- Delivery Time: 15-20 days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month



Product Specification

- Module Size: 320mm*160mm
- Pixel Pitch: 10mm
- Scan Mode: 1/4
- Max Power: 35W
- Weight: 0.37kg
- Package Mode: SMD3535
- Highlight: **P10 Outdoor Led Screen SMD3535, SMD3535 Led Video Wall Panels, 35W Outdoor Led Screen**

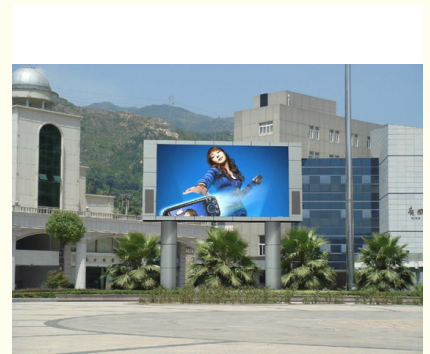

Product Description

35W P10 Outdoor Led Screen , SMD3535 Led Video Wall Panels 1/4 Scan Mode

Product Description

1. High brightness of high refresh rate.
2. Wide viewing Angle.
3. Excellent visual effect, better viewing effect for text and graphic or video.
4. With the best LED industrial waterproof and ultraviolet-proof SMD 3 in 1 technology to get a super wide viewing angle and a better surface flatness and stability. when the screen is used RGB deep gray processing to show colorful and exquisite images.
5. Environmental raw material.

P10 outdoor technology parameters

	Item	Parameter
sUnit Module	Model Number	SF-SS10-4S-A
	Module size	320mm*160mm
	Pixel pitch	10mm
	Pixels Density	10000dots/m2
	Pixel configuration	1R1G1B
	Package mode	SMD3535
	Pixel resolution	32dots(W)*16dots(H)
	Max Power	35W
	Module thickness	22mm
	Weight	0.37kg
	Drive type	Constant drive
	Scan mode	1/4
	Port type	HUB75-A
	Brightness of white balance	≥6800 7200cd/m2
LED Cabinet	Dimension	960mm*960mm*100 mm
	Monomer Module Number	18pcs
	Power supply	5V/40A*4pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	96mm*96mm
	Best viewing distance	8M 15M
	Best viewing angle	120°(W) 110°(H)
	Temperature	storage:-35℃ +85℃ working:-20℃ +50℃
	Relative humidity	10%-95%
Power	Thickness	122mm
	Working voltage	AC220V±10%
	Average Power consumption	180W/
	Max Power consumption	≤480W/
Control system	Current	≤20mA(single LED)
	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
Main technical parameter	Control method	Synchronization
	Driving device	Constant drive IC
	Refresh frequency	≥1200HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥9000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768

Features:

1. Ultra-slim die-cast cabinet design, more beautiful appearance and more easier to carry on.
2. P10 SMD LED display is high brightness and waterproof with SMD LED, which is used for outdoor open stadium. With IP65 rating can against bad weather.
3. High refresh rate up to 1920-4800hz, no scanning line and color patch by HD camera.
4. Different signal sources input are acceptable, such as TV, HDTV, SVideo, NTSC/PAL, DVI, VGA, SDI and HD-SDI. We supply high definition Video processor to realize the signal source transition.
5. High conformity of color and brightness makes the color of the display images more vivid.
6. High contrast ratio and high refresh rate technology makes the LED display performed well without any timelapse.

Project Show:



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen