




27.5W Outdoor Advertising Led Screen Pixel Pitch 4mm LED Display 1R1G1B

Our Product Introduction

Basic Information

- Place of Origin: SHENZHEN, CHINA
- Brand Name: SOL COLUR
- Certification: CE, EMC, IP65
- Model Number: P4
- Minimum Order Quantity: 1 Square Meters
- Price: Negotiable
- Packaging Details: CARTON, WOODEN CASE FLIGHT CASE
- Delivery Time: 15-20 days
- Payment Terms: L/C, D/A, D/P, T/T, , Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month

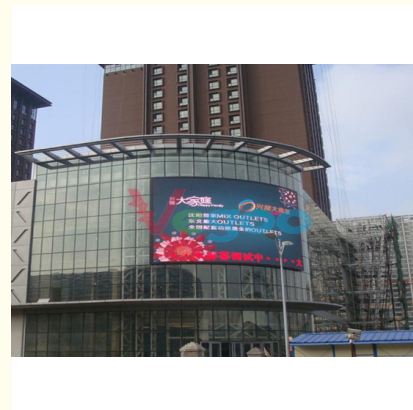

Product Specification

- Module Size: 320*160
- Pixel Pitch: 4mm
- Max Power: 27.5W
- Weight: 0.37kg
- Scan Mode: 1/8
- Module Thickness: 22mm
- Highlight: 27.5W Outdoor Advertising led screen, Outdoor Advertising led screen 1R1G1B, 4mm LED Display 1R1G1B



Product Description

27.5W Advertising Display Screens Pixel Pitch 4mm LED Display 1R1G1B Pixel Configuration

Product Description

1. Light and slim cabinet allows quick build screen in short time.
2. Die-cast aluminum molding technology produces high precision and rigid cabinet. It can ensure the whole screen in good uniformity.
3. High brightness uniformity and color uniformity.
4. Excellent flatness and no splicing gap between modules.
5. Quick installation and removal with facile connection lock

SC outdoor full-color technology parameters

	Item	Parameter
Unit Module	Model Number	SC-P4(1921) 80*40-4L 10S-V1.6
	Module size	320mm*160mm
	Pixel pitch	4mm
	Pixels Density	62500dot/m2
	Pixel configuration	1R1G1B
	Package mode	SMD1921
	Pixel resolution	80dots(W)*40dots(H)
	Max Power	27.5W
	Module thickness	22mm
	Weight	0.37kg
	Drive type	Constant drive
	Scan mode	1/8
	Port type	HUB75
	Brightness of white balance	≥6000 6500cd/m2
LED Cabinet	Dimension	960*960
	Monomer Module Number	18pcs
	Power supply	5V/60A*3 pcs
	Thermal discharge	fan 2pcs
	Pixel per cabinet	960mm*960mm
	Best viewing distance	4M 10M
	Best viewing angle	110°(W) 110°(H)
	Temperature	working:-20°C +50°C
	Relative humidity	10%-95%
Power	Thickness	100mm
	Working voltage	AC220V±10%
	Average Power consumption	325W/
	Max .Power consumption	≤975W/
Control system	Current	≤20mA(single LED)
	CPU	Pentium4 or above P4
	Operation system	WIN98/2000/NT/XP/WIN7
	Control method	Synchronization
Main technical parameter	Driving device	Constant drive IC
	Refresh frequency	≥1920HZ
	Grey scale/colors	4096gray level/16.7M colors
	MTBF	≥100000hours
	Power switch	Automatic switch
	Display Mode	≥800*600/1024*768

Product Features:

- 1, IP65 weather rating, ensures great quality outputs in every condition.
- 2, Excellence effect: high definition, high resolution, very applicable to the outdoor high density display
- 3, Stable performance: superior anti UV, sulfide resistant ability, can be long-term used in outdoor
- 4, SMD LEDs ensure large viewing angle, up to 110° horizontally and 110° vertically. Image no distortion, no color cast in any angle within this range, reaches to more audiences.
- 5, Three anti-protection: anti-corrosion, anti-static, moisture, shock, greatly improving the reliability of the product.

Project Show:



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen