




## Indoor P2.976 Led Rental Display High Gray Level Hanging Ground Installation

### Our Product Introduction


#### Basic Information

- Place of Origin: China
- Brand Name: Sol-colur
- Certification: CE/FCC/ROHS/ISO
- Model Number: P2.976
- Minimum Order Quantity: 1sqm
- Price: Negotiated
- Packaging Details: Flight case, Wooden case
- Delivery Time: 10 working days after receiving deposit
- Payment Terms: L/C, T/T
- Supply Ability: 5000sqm/month

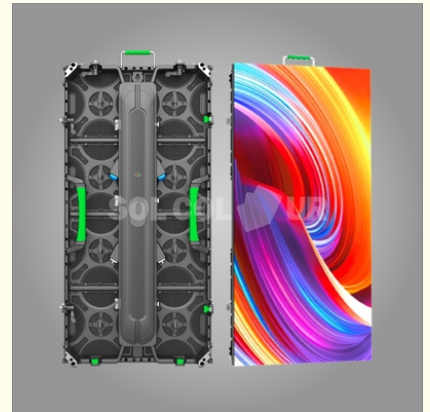

#### Product Specification

- LEDs Brand: Nationstar/Kinglight/Ruisheng/Mulinsen/speci
- Refresh Rate: 3840Hz-7680Hz
- Brightness: 600-1000 Cd/
- Scan Mode: 1/21 Scan
- Maintenance Methods: Rear & Front
- Module Size: 250\*250mm
- Cabinet Size: 500\*1000mm
- Cabinet Material: Die Casting Aluminum
- Cabinet Weight: 12 Kg
- Protection Level: IP30
- Max. Power Consumption: ≤700W/
- Ave. Power Consumption: ≤200W/
- Gray Level: 14 Bits-16 Bits
- Installation: Hanging/ Ground
- Highlight: **P2.976 led rental display.**

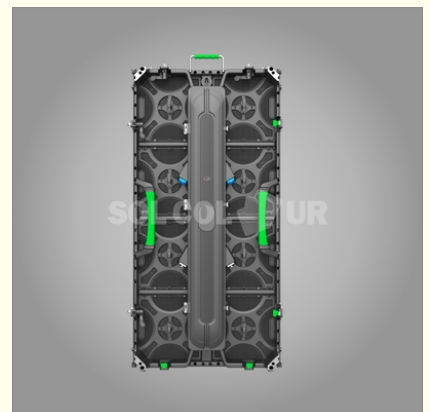

## Product Description

## Indoor P2.976 LED Screen High Gray Level 500x1000mm Die Casting Aluminum Cabinet

### Product features:

1. The ergonomic arc lock design supports compatibility with both straight and curved screens, fulfilling various customer requirements for flexible screen splicing.
2. Multiple layers of protection reduce maintenance needs. The lightweight die-cast aluminum cabinet is strong, highly precise, and resistant to deformation.
3. The power consumption averages just 200W, ensuring energy conservation and eco-friendliness.
4. 120-degree ultra-wide viewing angle.
5. RGB deep grayscale processing ensures rich and refined colors, resulting in crisp and lifelike image quality.
6. Easy and rapid disassembly and assembly.

### Product technical specifications:

Item	Parameter	Specification
Module parameters	Pitch	2.976mm
	LEDs	SMD1515
	Lead wire	Copper
	Module resolution	84*84 dots
	Module size ± tolerances	249.90±0.1(V)* 249.90±0.1(H)*17.9±0.5(D)
	Module weight ± tolerances	≤0.55 KGS
	Pixel density	122976 dots/
Cabinet parameters	Cabinet size ± tolerances	499.9(±0.1)(H)*999.9(±0.1) (V)* 76(±0.2)(D)
	Cabinet flatness	≤1.0mm
	Cabinet material	Die casting aluminum
	Cabinet weight ± tolerance	≤6.9 KGS
Cabinet parameters of screen	Module quantity for 1 cabinet	2*4=8 PCS
	Cabinet resolution	168*336 dots
	Cabinet + Module size ± tolerance	499.9(±0.1)(H)*999.9(±0.1) (V)*85(±0.2)(D)
	Cabinet + Module weight ± tolerance	12 KGS
	Maintenance methods	Rear/Front
	Flatness	≤1.0mm
	Screen seams	≤1.0mm


Optical parameters	Pixel-by-pixel brightness correction	Support
	Pixel-by-pixel chromaticity correction	Support
	White balance brightness	600-1000 cd/
	Color temperature	3000K-15000K
	Horizontal viewing angle	≥120°
	Vertical viewing angle	≥110°
	Viewing distance(=PITCH*1)	≥3m
Electrical parameters	Max. power consumption of cabinet	≤200 W
	Ave. power consumption	≤200W/
	Max. power consumption	≤700W/
	Power supply requirements	220-240V AC
Processing performance	Scan	21S
	Frame rate	50-60Hz
	Refresh rate	3840Hz-7680Hz
	Drive mode	Constant current
	Grayscale	14bits - 16bits
Control system	Control method	Ethernet port
	Control the distance	Cat5e Unshielded Twisted Pair
	Signal input	HDMI,DVI
	Brightness adjust	Manual/automatic/remote control
Operational parameters	Continuous working hours	≥ 5000hrs
	Mean time between failures	≥ 5000hrs
	Discrete out-of-control points	0 before shipping
	Continuous runaway points	0
	Blind spot rate	0 before shipping
	Screen temperature rise	≤ 65°C
Usage parameters	Typical life values	50000hrs
	Lamp temperature	≤60°
	Operating temperature	-10°~50°
	Storage temperature	-20°~50°

	Operating humidity	10~65%RH no condensation
	Storage humidity	10~65%RH no condensation
Protection	Protection level	IP30
Certification	CE/FCC/ROHS/ISO	/

Reference pictures:



PRODUCT DETAILS




The handle




Side lock




The positioning pin



Rear cover



handle

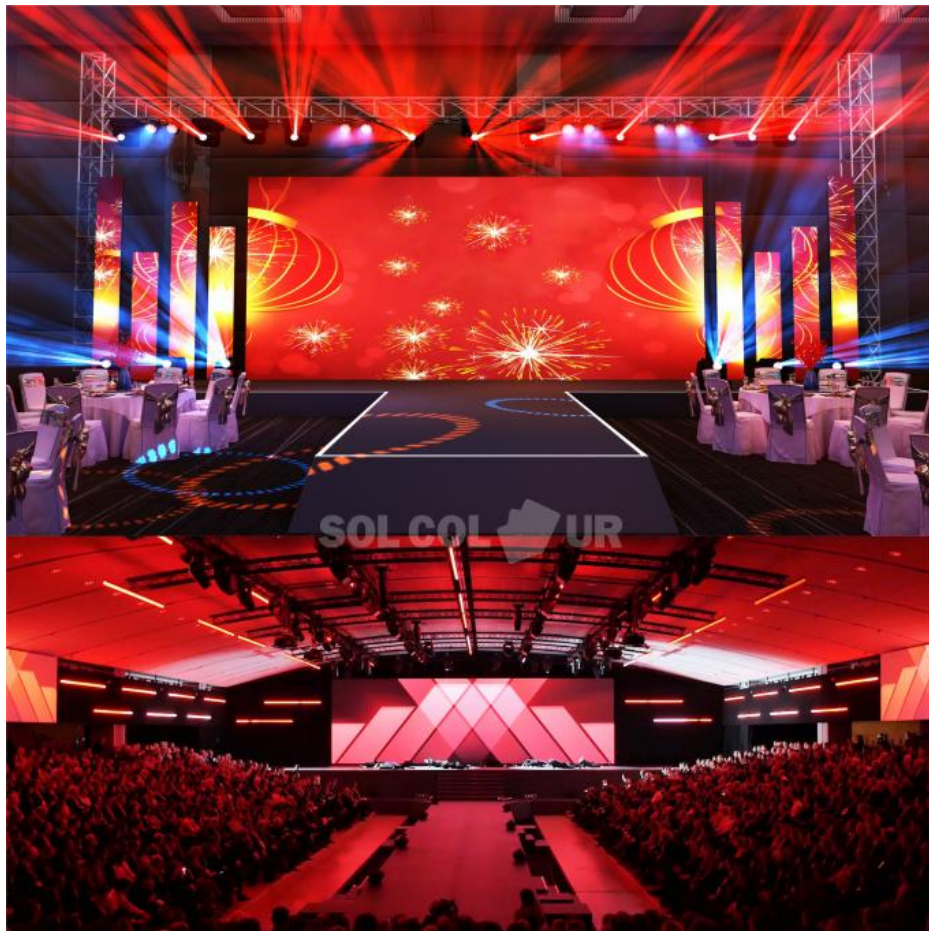

**SOL COLUR** SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen