




IP30 Quick Installation Indoor LED Display Module P1.25/P1.5/P1.8/P2/P2.5

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Sol-colur
- Certification: CE/FCC/ROHS/ISO
- Model Number: P1.25/P1.5/P1.8/P2/P2.5
- Minimum Order Quantity: 1sqm
- Price: Negotiated
- Packaging Details: Flight case, Wooden case
- Delivery Time: 10 working days after receiving deposit
- Payment Terms: L/C, T/T
- Supply Ability: 5000sqm/month

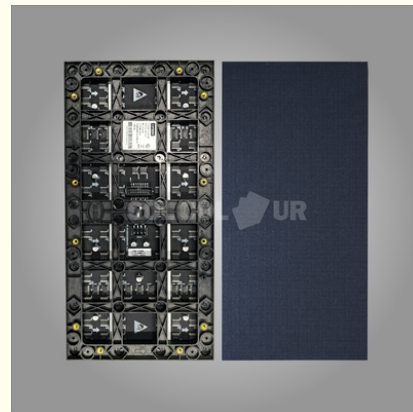

Product Specification

- LEDs Brand: Nationstar/Kinglight/Ruisheng/Mulinsen/specified
- Refresh Rate: 3840Hz-7680Hz
- Protection Level: IP30
- Max. Power Consumption: $\leq 390\text{w/m}^2$
- Ave. Power Consumption: $\leq 130\text{w/m}^2$
- Color Value: 16.7M
- Viewing Angle: $150^\circ/130^\circ$
- Module Size: 320mmx160mm/320mmx180mm
- Uasge: Indoor
- Highlight: **Indoor LED Display Module P1.25, IP30 Indoor LED Display Module, p2.5 led module Quick Installation**

for more products please visit us on sol-colur.com

Product Description

Product features:

1. Plastic steel products use plastic steel bottom shell and plastic steel back cover
2. High-precision composite material printed circuit board, effectively improving product cost performance
3. Can be installed with simple steel structure, high efficiency and low cost
4. IC uses S-PWM constant current drive + 5958 serial decoding
5. Good display effect: constant current drive chip is used, the playback effect is bright and smooth

Product technical specifications:

Item	Specification				
Model	P1.25	P1.5	P1.8	P2	P2.5
Pitch	1.25mm	1.53mm	1.86mm	2.0mm	2.5mm
LEDs	SMD1010	SMD1212	SMD1515	SMD1515	SMD2020
Module size	320mmx160mm/320mmx180mm				
Module resolution	256x128/256x144	208x104/208x116	176x86/176x96	160x80/160x90	128x64/128x72
Pixel density	640000dot/m ²	422500dot/m ²	288906dot/m ²	250000dot/m ²	160000dot/m ²
White balance brightness	>450 cd/m ²				>500 cd/m ²
viewing angle(Horizontal/Vertical)	150°/130°				
Viewing distance	>1.25m	>1.5m	>2m	>2m	>3m
Color value	16.7M				
Max. power consumption	390w/m ²				
Ave. power consumption	130w/m ²				
Refresh rate	3840Hz				
Application Scenario	Indoor(IP30)				
Working voltage	AC100~240 50/60Hz				
Lifespan	100,000 Hours				

Reference pictures:

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD

+86 13751136904

chenhao@sol-colour.com

sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District, Shenzhen