

P2.5mm Cylindrical Flexible LED Display Screen

Our Product Introduction

for more products please visit us on sol-colur.com


Basic Information

- Place of Origin: China
- Brand Name: Sol-colur
- Certification: CE/FCC/ROHS/ISO
- Model Number: P2.5
- Minimum Order Quantity: 1sqm
- Price: Negotiated
- Packaging Details: Flight case, Wooden case
- Delivery Time: 10 working days after receiving deposit
- Payment Terms: L/C, T/T
- Supply Ability: 5000sqm/month



Product Specification

- LEDs Brand: Nationstar/Kinglight/Ruisheng/Mulinsen/speci
- Refresh Rate: 3840Hz-7680Hz
- Protection Level: IP30
- Max. Power Consumption: $\leq 450\text{w/m}^2$
- Ave. Power Consumption: $\leq 150\text{w/m}^2$
- Color Value: 16.7M
- Viewing Angle: $150^\circ/130^\circ$
- Module Size: 320mmx160mm
- Uasge: Indoor
- Working Voltage: AC100~240 50/60Hz
- Lifespan: 100,000 Hours
- Highlight: Cylindrical Flexible LED Display Screen,
P2.5mm Flexible LED Display Screen,
P2.5mm Cylindrical LED Display

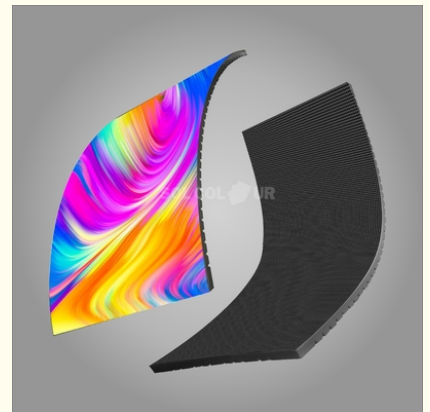

Product Description

P2.5 Cylindrical Screen Flexible LED Display Panel with Silicone Soft Frame and PCB Board

Product features:

1. Standardized size: 320mmx160mm
2. High reliability, high contrast
3. Strong magnetic adsorption design, good flatness
4. Easy to bend, convenient and seamless splicing
5. Various shapes: inner arc, outer arc, cylindrical, wavy, etc.

Product technical specifications:

Item	Specification
Model	P2.5
Pitch	2.5mm
LEDs	SMD2020
Module size	320mm x160mm
Module resolution	128x64
Pixel density	160000 dot/m ²
White balance brightness	500-800 cd/m ²
viewing angle	150°/130°
(Horizontal/Vertical)	150°/130°
Viewing distance	>3m
Color value	16.7M
Max. power consumption	450w/m ²
Ave. power consumption	150w/m ²
Refresh rate	3840Hz
Application Scenario	Indoor(IP30)
Working voltage	AC100~240 50/60Hz
Lifespan	100,000 Hours

Reference pictures:



2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen