




P5.7 Outdoor Energy Saving LED Display 960x960mm Wide Viewing Angle IP65

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Sol-colur
- Certification: CE/FCC/ROHS/ISO
- Model Number: P5.7
- Minimum Order Quantity: 1pcs
- Price: Negotiated
- Packaging Details: Carton box, Wooden case
- Delivery Time: 10 working days after receiving deposit
- Payment Terms: L/C, T/T
- Supply Ability: 5000sqm/month

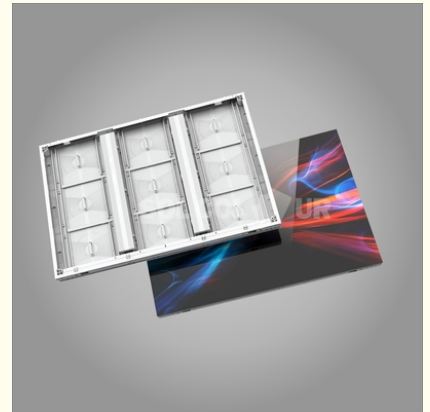

Product Specification

- Module Size: 480x320mm
- Cabinet Size: 960x960mm Or Customized
- Cabinet Weight: 28kg/
- Cabinet Material: Profile Aluminum
- LEDs Brand: Nationstar/Kinglight/Mulinsen/Specified
- Refresh Rate: 3840Hz - 7680Hz
- Brightness: ≥ 6500 nits
- Max. Power Consumption: 650W/
- Ave. Power Consumption: 220W/
- Gray Level: 14bits - 16bits
- Viewing Distance: ≥ 5 m
- Protection Level: IP65
- Operating Voltage: AC110V/220V $\pm 10\%$
- Highlight: **P5.7 Energy Saving LED Display,**
Energy Saving LED Display 960x960mm,
P5.7 Energy Saving LED Display

for more products please visit us on sol-colur.com

Product Description

P5.7 Low power consumption Energy Saving Outdoor Display Screen 960x960mm Wide Viewing Angle IP65

Product features:

1. The voltage divider power supply design has an average power consumption of up to 220W and more than 6500nit.
2. High brightness, environmental protection and energy-saving.
3. 140°(H/V) ultra-wide viewing angle; It can be spliced at right angles and arcs, and it is easy to achieve naked-eye 3D.
4. High brim mask design, good ink color consistency, high contrast, up to 9500:1.
5. The colors are rich and delicate; The picture is clear and natural.
6. High-strength anti-aging fabric, IP65 protection level: die-cast aluminum bottom shell, high heat dissipation ribs.
7. The design has good heat dissipation performance and prolongs the service life of the screen.

Product technical specifications:

| Item | Parameter |
|------------------------|-----------------------|
| Model | P5.7 |
| Pixel pitch | 5.71mm |
| LEDs | SMD2727 |
| Module size | 480x320mm |
| Module resolution | 84x56 dots |
| Cabinet size | 960x960x77mm |
| Cabinet resolution | 168x168 dots |
| Cabinet material | Profile Aluminum |
| Cabinet weight | 28kg |
| Maintenance methods | Front |
| Brightness | ≥6500 cd/ |
| Refresh rate | 3840Hz-7680Hz |
| Gray level | 14bits-16bits |
| Scan mode | 1/7 scan |
| Viewing angle | 140°/140° |
| Viewing distance | ≥5m |
| Max. power consumption | 650W/ |
| Ave. power consumption | 220W/ |
| Input signal | DVI, VGA, HDMI, HDSDI |
| Operating temperature | -20-60°C |
| Operating humidity | 10-90% RH |
| Operating voltage | AC 110V / 220V ±10% |

Reference pictures:



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen