




## 140° Viewing Angle Energy Saving Led Display P10 Outdoor IP65 960x960mm

### Our Product Introduction

#### Basic Information

- Place of Origin: China
- Brand Name: Sol-colur
- Certification: CE/FCC/ROHS/ISO
- Model Number: P10
- Minimum Order Quantity: 1pcs
- Price: Negotiated
- Packaging Details: Carton box, Wooden case
- Delivery Time: 10 working days after receiving deposit
- Payment Terms: L/C, T/T
- Supply Ability: 5000sqm/month

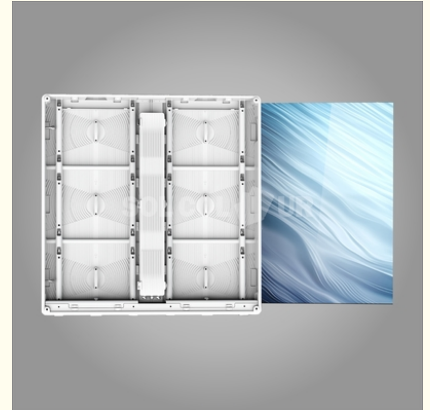

#### Product Specification

- Module Size: 480x320mm
- Cabinet Size: 960x960mm
- Cabinet Weight: 28kg/
- Cabinet Material: Profile Aluminum
- LEDs Brand: Nationstar/Kinglight/Mulinsen/Specified
- Refresh Rate: 3840Hz - 7680Hz
- Brightness:  $\geq 6500$ nits
- Max. Power Consumption: 650W/
- Ave. Power Consumption: 200W/
- Gray Level: 14bits - 16bits
- Viewing Distance:  $\geq 5$ m
- Protection Level: IP65
- Operating Voltage: AC110V/220V $\pm 10\%$
- Highlight: **Led Display P10 Outdoor IP65, Energy Saving Led Display IP65, IP65 Led Display Energy Saving**

## Product Description

### P10 Low power consumption 140° Viewing Angle Energy Saving Outdoor Display Screen IP65 960x960mm

#### Product features:

1. The voltage divider power supply design has an average power consumption of up to 200W and more than 6500nit.
2. High brightness, environmental protection and energy-saving.
3. 140°(H/V) ultra-wide viewing angle; It can be spliced at right angles and arcs, and it is easy to achieve naked-eye 3D.
4. High brim mask design, good ink color consistency, high contrast, up to 9500:1.
5. The colors are rich and delicate; The picture is clear and natural.
6. High-strength anti-aging fabric, IP65 protection level: die-cast aluminum bottom shell, high heat dissipation ribs.
7. The design has good heat dissipation performance and prolongs the service life of the screen.

#### Product technical specifications:

| Item                   | Parameter             |
|------------------------|-----------------------|
| Model                  | P10                   |
| Pixel pitch            | 10mm                  |
| LEDs                   | SMD2727               |
| Module size            | 480x320mm             |
| Module resolution      | 48x32 dots            |
| Cabinet size           | 960x960x77mm          |
| Cabinet resolution     | 96x96 dots            |
| Cabinet material       | Profile Aluminum      |
| Cabinet weight         | 28kg                  |
| Maintenance methods    | Front                 |
| Brightness             | ≥6500 cd/             |
| Refresh rate           | 3840Hz-7680Hz         |
| Gray level             | 14bits-16bits         |
| Scan mode              | 1/2 scan              |
| Viewing angle          | 140°/140°             |
| Viewing distance       | ≥5m                   |
| Max. power consumption | 600W/                 |
| Ave. power consumption | 200W/                 |
| Input signal           | DVI, VGA, HDMI, HDSDI |
| Operating temperature  | -20-60°C              |
| Operating humidity     | 10-90% RH             |
| Operating voltage      | AC 110V / 220V ±10%   |

Reference pictures:



**SOL COLUR**  **SHENZHEN SOL COLUR DISPLAY CO.,LTD**

 +86 13751136904

 [chenhao@sol-colour.com](mailto:chenhao@sol-colour.com)

 [sol-colur.com](http://sol-colur.com)

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,  
Shenzhen