




P10mm Naked Eye Glasses Free Large Outdoor 3D LED Display Profile Aluminum

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Sol-colur
- Certification: CE/FCC/ROHS/ISO
- Model Number: P10
- Minimum Order Quantity: 1pcs
- Price: Negotiated
- Packaging Details: Carton box, Wooden case
- Delivery Time: 10 working days after receiving deposit
- Payment Terms: L/C, T/T
- Supply Ability: 5000sqm/month

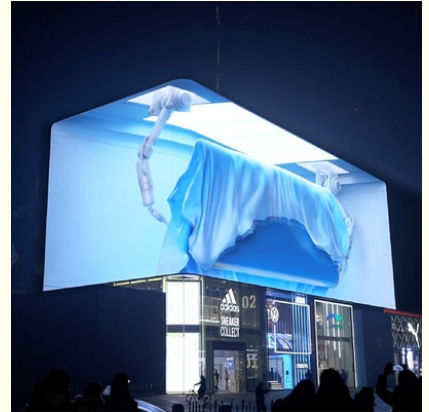

Product Specification

- Module Size: 480x320mm
- Cabinet Size: 960x960mm
- Cabinet Weight: 28kg/
- Cabinet Material: Profile Aluminum
- LEDs Brand: Nationstar/Kinglight/Mulinsen/Specified
- Refresh Rate: 3840Hz - 7680Hz
- Brightness: ≥ 6500 nits
- Max. Power Consumption: 650W/
- Ave. Power Consumption: 200W/
- Gray Level: 14bits - 16bits
- Viewing Distance: ≥ 5 m
- Protection Level: IP65
- Operating Voltage: AC110V/220V $\pm 10\%$
- Highlight: **Profile Aluminum Outdoor 3D LED Display, P10mm Outdoor 3D LED Display, P10mm Outdoor 3D LED Display**



for more products please visit us on sol-colur.com

Product Description

P10 Naked Eye Glasses free 3D Large Outdoor LED Display Profile Aluminum


Product features:


1. The voltage divider power supply design has an average power consumption of up to 200W and more than 6500nit.
2. High brightness, environmental protection and energy-saving.
3. 140°(H/V) ultra-wide viewing angle; It can be spliced at right angles and arcs, and it is easy to achieve naked-eye 3D.
4. High brim mask design, good ink color consistency, high contrast, up to 9500:1.
5. The colors are rich and delicate; The picture is clear and natural.
6. High-strength anti-aging fabric, IP65 protection level: die-cast aluminum bottom shell, high heat dissipation ribs.
7. The design has good heat dissipation performance and prolongs the service life of the screen.

Product technical specifications:

Item	Parameter
Model	P10
Pixel pitch	10mm
LEDs	SMD2727
Module size	480x320mm
Module resolution	48x32 dots
Cabinet size	960x960x77mm
Cabinet resolution	96x96 dots
Cabinet material	Profile Aluminum
Cabinet weight	28kg
Maintenance methods	Front
Brightness	≥6500 cd/
Refresh rate	3840Hz-7680Hz
Gray level	14bits-16bits
Scan mode	1/2 scan
Viewing angle	140°/140°
Viewing distance	≥5m
Max. power consumption	600W/
Ave. power consumption	200W/
Input signal	DVI, VGA, HDMI, HDSDI
Operating temperature	-20-60°C
Operating humidity	10-90% RH
Operating voltage	AC 110V / 220V ±10%

Reference pictures:

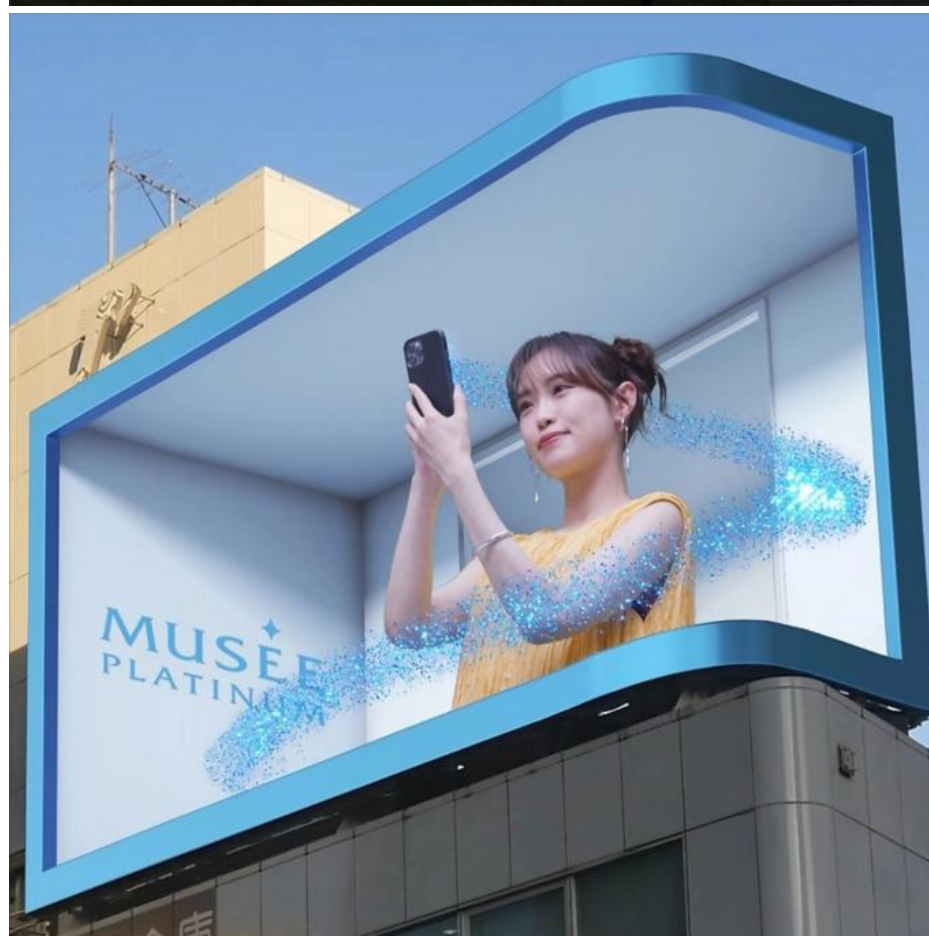

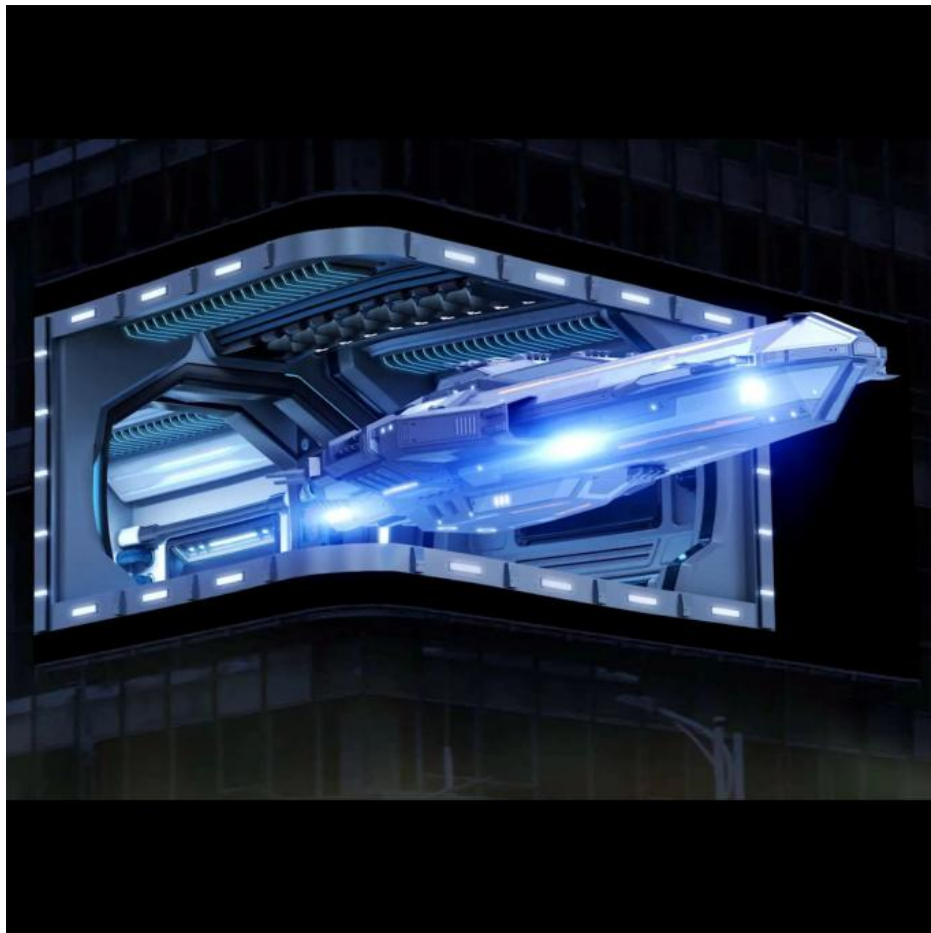

SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colur.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyan Street, Bao'an District,
Shenzhen