




Super Slim Rgb P10 Led Display Module Lightweight 320 X 160mm Size

Our Product Introduction


Basic Information

- Place of Origin: SHENZHEN
- Brand Name: SC
- Certification: ISO9001,FCC,IP65,3C ,ROSH
- Model Number: P10 Outdoor
- Minimum Order Quantity: 1 Square Meters / 1 Piece
- Price: Negotiable
- Packaging Details: Wooden box,Flight Case
- Delivery Time: 10 days after received deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union
- Supply Ability: 5000 Square Meter/Square Meters per Month

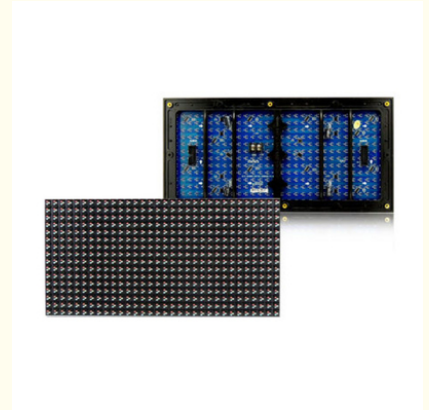

Product Specification

- Brightness: 4500-5500Nits
- Scan Mode: 4s
- Warranty: 2 Years
- Driver IC: MBI 5124
- Uasge: Outdoor
- Place Of Origin: Shenzhen China
- Highlight: p10 led display module Lightweight, Super Slim P10 Led Display Module , Lightweight p10 rgb led module

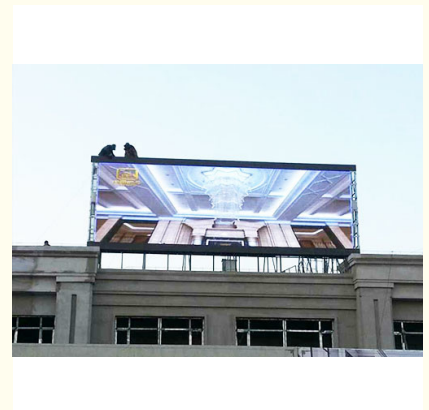

Product Description

P10 Outdoor LED Video Wall High Refresh rate 320X160mm full color led screen RGB Video wall

Product Description :

High brightness P10 Panel Outdoor P10 SMD 3535 LED Rental Screen:

- 1) High cost performance.
- 2) Good Consistency and High resolution.
- 3) High brightness and refresh rate .
- 4) Good after-sale services.
- 5) In the premise of guaranteeing quality,our company sales at low profit and warranty for 2 years.

Advanced Control Technology

- a. Calibration: Pixel-by-pixel brightness and color calibration technique to keep uniform brightness and natural colors of LED display.
- b. Monitoring: Proprietary control system can monitor the temperature, brightness, status information of LED display in real time.
- c. Remote network control: Controlling and changing all display information, controlling the displays of several cities in one place to change the contents at any time.
- d. Adjustable brightness: Adjusting screen brightness automatically according to environmental lighting based on sensitive control system, adjusting it manually or by programmable menu.
- e. Large screen control: Controlling super large size display stably without any black screen, frame vibration or reducing.
- f. High refresh rate, high gray scale and high contrast ratio: More realistic pictures optimize commercial advertisement value.

Parameter

No	Item	Parameter
1	Pixel Pitch	10mm
2	Pixel Configuration	1R1G1B / R:G:B=3:6:1
3	LED Lamp	Full color
4	Density	10000dot/m ²
5	Module Size	320*160mm
6	Module Pixel	32*16=512dot
7	Module Thickness	17mm
8	Module Weight	395g
9	Module Power	≤63W
10	Drive Voltage	DC5V
11	Module Electric Current	11-12.5A
12	PortType	HUB-75D/B

3 Screen Parameter

No	Item	Parameter
1	Standard Caninet Size	960mm*960mm*130mm
2	Cabinet Weight	9.85KGS
3	Brightness/Adjustment	≥7800cd/m ² , Level 16- Automatic / Level 100-Manual operation
4	View Angle	≥120°(Vertical),≥120°(Horizontal)
5	Best View Distance	10-100m
6	Grey Scale	Within 65536 Step
7	Frame Frequency	≥60Hz
8	Refresh Rate	≥1560Hz
9	Signal Input Source	Composite, S-video, Component, VGA, DVI, HDMI, SDI, HD-SDI
10	Scan Mode	1/2 1/4
11	Drive IC	5020
12	Module Qty / M ²	19.5
13	Display Color Qty	16777216
14	Continuous Working Time	>24(Hrs)
15	Screen Lifespan	>100,000(Hrs)
16	MTBF	>5000(Hrs)
17	Max. power consumption	1250W/
18	Ave. power consumption	420W/
19	Out of control pixel rate	≥3/10,000(discrete distribution)
20	Control Distance	100M(Ethernet) 500M(Multi-fiber) 10KM(Sigle-fiber)
21	Flatness	Screen Surface≤0.5mm,Pixel Pitch≤0.3mm
22	Operation Temperature	-10°C +50°C
23	Working Humidity	10% 98%RH

24	Storage Temperature	-40°C +85°C
25	Software Connection	Standard Computer Connection,Compatible With Windows,Unix,Novell
26	protection system	Overtemperature/overload/power/image compensation/nonlinear correction
27	Working Valtage	200~240 V
28	Dielectric Strength	50HZ/1500V(AC RMS)/1min
29	Temperature Rise	Metal≤40K,Insulation≤65K , After Heat Balance
30	IP Grade	IP65
31	Computer display mode	1024*768
33	Media Player	LED Pressional Media Player

Product Function

Stable performance,wide applicability, high brightness, superb performance/price ratio.

1. High brightness enables longer viewing distance and ensures the spectators far from the screen can still enjoy what is shown.
2. Superb performance/price ratio offers you both top notch quality and reasonable price, maximizing the value of your investment.

Product Show



SOL COLUR SHENZHEN SOL COLUR DISPLAY CO.,LTD



+86 13751136904



chenhao@sol-colour.com



sol-colour.com

2nd Floor, Building 8, Nangang Third Industrial Zone, TangtouCommunity, Shiyao Street, Bao'an District, Shenzhen